



FUNCTIONAL SERVICING and STORMWATER MANAGEMENT REPORT

IN SUPPORT OF

ZONING BY-LAW AMENDMENT and PLAN OF SUBDIVISION

CITY PARK (DIXIE ROAD) INC.

**2103 – 2119 PRIMATE RD., 1351 & 1357 WEALTHY PL.,
2116 & 2112 DIXIE RD.**

CITY OF MISSISSAUGA

REGIONAL MUNICIPALITY OF PEEL

October 16, 2018

March 1, 2019

Updated: August 14, 2019

C.E. FILE: 17-017



TABLE OF CONTENTS

	PAGE NO.
A.0. INTRODUCTION	4
B.0. EXISTING TOPOGRAPHICAL CHARACTERISTICS	5
C.0. WATER SUPPLY	6
D.0. SANITARY SERVICING.....	7
D.1. CONDOMINIUM DEVELOPMENT (LOTS 1 -18).....	7
D.2. FREE-HOLD LOTS (LOTS 19 - 2E)	9
E.0. STORM WATER MANAGEMENT	11
E.1. STORMWATER QUALITY CONTROL.....	11
E.2. STORMWATER RETENTION MEASURES (LIDs)	13
E.3. STORMWATER QUALITY CONTROL.....	17
F.0. EROSION AND SEDIMENT CONTROLS (CSC).....	18
G.0. CONCLUSIONS AND RECOMMENDATIONS.....	19



APPENDIX 'A'	- Key Map
APPENDIX 'B'	- Credit Valley Conservation Watershed Map
APPENDIX 'C'	- Topographic Survey
APPENDIX 'D'	- E-Mail Correspondence with Region of Peel with Regards to Watermain Distribution Modelling dated November 3, 2017
APPENDIX 'E'	- Servicing Plan - Grading Plan
APPENDIX 'F'	- Sanitary Design Sheet
APPENDIX 'G'	- External Sanitary Sewer Drainage Plan – Applewood East Acres
APPENDIX 'H'	- E-Mail Correspondence with City with Regards to Storm Quality Control Requirements
APPENDIX 'I'	- Rainwater Barrel Sizing Calculation - Infiltration Bed Sizing Calculation - Pre-Treatment OGS Manhole Design – CDS 2020 Model
APPENDIX 'J'	- Stormwater Quantity Control Analysis - Stage Storage Analysis - Pre-development Storm Tributary Plan - Post-development Storm Tributary Plan - Primate Road Ditch and Culvert Capacity Analysis - Freehold Lots Soak-away Pit Design - Existing 300mm Dia. Culvert (Crossing Wealthy Pl.) Capacity Calculation - Twin 250mm Dia. HPDE Culvert (Crossing Wealthy Pl.) Capacity Calculation
APPENDIX 'K'	- Geotechnical Investigation Prepared by Bruce A. Brown Associates Limited, dated October 4, 2018



A.0. – INTRODUCTION

The property is located on the West side of Dixie Road, East of Primate Road, and North of Wealthy Place, City of Mississauga, see Appendix 'A' for Key Map. The subject site is known as 2103-2119 Primate Road, 1351 and 1357 Wealthy Place, 2116 and 2112 Dixie Road, City of Mississauga, Regional Municipality of Peel and is approximately 1.2751 ha in size. The subject lands are located within a residential area. Due to the established Regional Road Widening of Dixie Road, the total developable area has been reduced to 1.1151 ha. The site location is within Lake Ontario Shoreline East Tributaries Subwatershed. Refer to Credit Valley Conservation Watersheds & Subwatersheds Map in Appendix 'B'. The proposal consists of 8 Freehold detached units fronting existing municipal Primate Road, and 18 condominium detached units fronting a proposed common element condo road. In support of the proposed development, we provide this report to identify the methodology of the municipal servicing. More specifically the report will substantiate the ability to provide municipal sanitary, water servicing, and provide a conceptual resolution for storm water management.



B.0. - EXISTING TOPOGRAPHICAL CHARACTERISTICS

See attached in Appendix 'C', the Topographic Survey. The site consists of 8 existing detached homes situated on developed residential lots, with sparse tree covering. The properties also have pool and shed structures. These will be removed to accommodate the development.

The majority (79.6%) of the property presently drains in a north-easterly direction towards the Regional Dixie Road R.O.W. The balance of the subject lands; approximately 20.4% drains in a southerly direction towards the road ditches of Wealthy Place and Primate Road R.O.W. In addition, a significant external area (0.2829ha) to the west consisting of existing rear-lot grassed areas drains through the subject property to the Dixie Road R.O.W. Refer to Appendix 'J' for the Pre-development Storm Tributary Plan illustrating existing drainage patterns, catchments and associated areas.

The existing grading of the Site is comprised of moderate slopes, with an approximately 2.8m difference in elevation between the highest and lowest point of the site. The highest grade is at an elevation of 111.59m adjacent to North property line of the subject lands, and the lowest elevation is 108.77 m at the Southeast corner.



C.0. WATER SUPPLY

The water supply capacity must be confirmed to ensure the proposed site plan development can be adequately serviced per Region of Peel requirements. As per the e-mail correspondence with Region of Peel dated November 3, 2017 Appendix 'D', external modelling information will be provided by the Region after the first submission of the Functional Servicing Report.

Watermain analysis will be carried out after the modelling information is provided.

The 8 freehold detached dwellings fronting Primate Road will be serviced by the existing 150mm dia. main via new 25mm dia. copper services.

The site plan will be serviced by a single 150mm dia. main connection to Wealthy Place. A valve box and detector valve chamber is placed inside the property line at Wealthy Place per Region of Peel Standards. The proposed 150mm diameter watermain connection will run from the Site driveway entrance (at Wealthy Place cul-de-sac)- southerly along the existing Wealthy Place roadway and connect to an existing 150mm diameter watermain on the east side of Wealthy Place, north of Primate Road. Internally 150mm dia. main will be looped to provide better circulation. Two private hydrants are proposed to provide 75m fire coverage for the site plan. The hydrant on the North side also serves as a flushing point. Each detached unit will have a separate 25mm dia. copper service complete with a water box. All existing water services not required to service the development will be removed and decommissioned at the Developer's sole expense and in accordance with the Region's standards and specifications. The watermain layout has been presented on the Servicing Plan - Drawing # 17-017-02, Appendix 'E'. It is expected that no future/external developments will be connecting to this site plan, thus the mains do not need to be oversized. Once the deep services have been constructed up to base asphalt, full occupancy demands are expected to occur in a year.



D.0. SANITARY SERVICING

There are 8 existing detached homes on the subject property that are to be demolished. Two homes are serviced from Dixie Road sanitary sewer, two homes are serviced from Wealthy Place, and three homes are serviced from Primate Road. The eight service connections and the mainline from EXSAN MH46 on Dixie Road to the existing MH on Primate Road are to be decommissioned at the Developer's sole expense and in accordance with the Region's standards and specifications.

D.1. CONDOMINIUM DEVELOPMENT (LOTS 1 -18)

The proposed development is comprised of 18 detached condominium dwellings (Lot 1 -18) on 0.8817 ha fronting onto a condominium road. Based upon Region of Peel's "Sanitary Sewer Design Criteria Manual - Section 2" criteria the peak sanitary flow from the proposed development is calculated as follows:

Residential population estimation (Based on 50 persons per hectare)

$$= 50 \text{ persons/hectare} \times 0.8648 \text{ ha} = 43.24 \text{ persons}$$

Average Daily Flow (Based on 302.8 litres / capita / day)

$$= 43.24 \text{ persons} \times 302.8 / (24 \times 60 \times 60) = 0.152 \text{ litres / second}$$

Peaking Factor (Based on the Harmon formula)

$$K = 1 + 14 / (4 + P^{1/2}), \text{ where } P \text{ is population in thousands}$$

$$K = 1 + 14 / (4 + (43.24 / 1000)^{1/2}) = 4.3, \text{ however the peaking factor is limited to the Range of } 2 - 4.$$



Maximum Sanitary Flow (Based on Avg. daily flow times the Peaking Factor)

Max. Sanitary Flow = 0.152 litres / second x 4 = 0.61 litres / second

Wet Weather Infiltration

Area (0.2 litres / second / gross hectare) = 0.2 x 0.8648 = 0.173 litres / second

Manhole (0.28 litres / second / manhole) = 0.28 x 7 = 1.96 litres / second

Sewer (0.028 litres / second / m) = 0.028 x 189.53 = 5.31 litres /second

Total = 0.173 + 1.96 + 5.31 = 7.44 litres / second

Total Design Sanitary Flow (Based on Max. Sanitary Flow + Infiltration)

Total Design Sanitary Flow = 0.61 + 7.44 = 8.05 litres / second

To service the site for sanitary sewage a 250 mm diameter connection, Region's minimum size, is proposed to connect to the existing 250 mm diameter municipal sanitary sewer within Wealthy Place. Refer to the Site Servicing Plan (Dwg# 17-017-02) for details of the proposed connection. A 250 mm diameter sewer at 1.5% slope has a full flow capacity of 72.77 litres per second, well above the calculated total design flow of 8.05 litres per second (approximately 11.1%). See attached Sanitary Sewer Design Chart, Appendix 'F'. It is expected that no future/external development will be connected to this site plan, thus sewers do not need to be oversized. Once the sewers have been constructed up to base asphalt, full occupancy demands are expected to occur in a year. As per the external sanitary sewer drainage plan for the surrounding area (Appendix 'G') the site discharge is conveyed by a 250 mm sewer along Wealthy Place, Courtland Crescent, and Harvest Road before ultimately discharging to a 1050 mm dia. sanitary trunk sewer on North Service Road.



D.2. FREE-HOLD LOTS (LOTS 19 - 26)

There are 8 detached homes on 0.2457 ha fronting onto municipal Primate Road.

Residential population estimation (Based on 50 persons per hectare)

$$= 50 \text{ persons/hectare} \times 0.2457 \text{ ha} = 12.29 \text{ persons}$$

Average Daily Flow (Based on 302.8 litres / capita / day)

$$= 12.29 \text{ persons} \times 302.8 / (24 \times 60 \times 60) = 0.043 \text{ litres / second}$$

Peaking Factor (Based on the Harman Formula)

$$K = 1 + 14 / (4 + P^{1/2}), \text{ where "P" is population in thousands}$$

$$K = 1 + 14 / (4 + (12.29 / 1000)^{1/2}) = 4.5, \text{ however the peaking factor is limited to the range of 2 - 4.}$$

Maximum Sanitary Flow (Based on Avg. daily flow times the Peaking Factor)

$$\text{Max. Sanitary Flow} = 0.043 \text{ litres / second} \times 4 = 0.172 \text{ litres / second}$$

Wet Weather Infiltration

$$\text{Area (0.2 litres / second / gross hectare)} = 0.2 \times 0.2457 = 0.05 \text{ litres / second}$$

Total Design Sanitary Flow (Based on Max. Sanitary Flow +infiltration)

$$\text{Total Design Sanitary Flow} = 0.172 + 0.05 = 0.222 \text{ litres / second}$$

To service these 8 lots, residential service connections will be made to the existing 250mm diameter sewer on Primate Road. The existing 250mm diameter sewer at 0.81% slope has a full



flow capacity of 53.47 litres per second well above the calculated total design flow of 0.222 litres per second (approximately 0.42%). Similar to the site plan, the freehold lots discharge is conveyed by a 250mm sewer along Primate Road, Courtland Crescent, and Harvest Road before ultimately discharging to a 1050mm dia. sanitary trunk sewer on North Service Road.



E. 0. – STORM WATER MANAGEMENT

As per consultation with the City of Mississauga and Region of Peel; the Pre-development Storm Tributary Plan verifies that the primary storm outlet for this Site is Dixie Road. Under pre-development conditions, as shown on DWG 17-017-05 in Appendix 'J', a total of 1.171 ha of area, identified as Area A, drains north-easterly towards Dixie Road and includes external drainage area from the west. The balance of the tributary area equal to 0.2265 hectares, identified as Area B, drains southerly to Primate Road and easterly to Wealthy Place.

E.1. STORMWATER QUANTITY CONTROL

City and Region criteria for this site require the 100-year post- development flows be restricted to 2-year pre-development flow level.

As mentioned in a previous section. Section A.0., the total developable land is 1.1151 ha. This excludes the lands that will be conveyed for Regional Road widening, which will be graded uncontrolled towards Dixie Road. The free-hold lots; Lots 19 - 26 (0.2457 ha) identified as Area D, will be graded to drain overland towards Primate Road via a rear to front drainage pattern design. The balance of the site (0.8694 ha) identified as Area C, along with an external area of 0.2829 ha from the west has been designed to drain to the Dixie Road storm sewer system. Please refer to DWG 17-017-06 in Appendix 'J' for the Storm Tributary Plan.

E.1.1. PRIMATE ROAD OUTLET (FREE-HOLD LOTS)

The Free-hold lots fronting Primate Road must drain independently of the condominium portion of the development and are tributary to the existing ditch system on Primate Road. As illustrated on the Pre and Post development drainage area plans (Appendix 'J') there is a slight increase in both area and imperviousness. During a 100 year storm event, the Pre and post development flows were calculated to be 43.87 LPS and 53.62 LPS, respectively. At a minimum; City Staff



has requested the 100 – year Post development flow be reduced to the 100 - year Pre-development Flow level to ensure no increase of 100-year flow be directed to the Primate Rd. and Wealthy Place ditching / culvert system.

Subsurface soak-away pits located underneath the driveways of the freehold lots have been proposed to mitigate the 100-year Post-development flow to Pre-development level by retaining a portion of the roof runoff. Given that the 100-year increase in flow is just under 10 LPS; each of the 8 freehold lots will need to retain a minimum of 1.25 LPS. Refer to the “Soak-away Pit Design for Freehold Lots” calculation (Appendix ‘J’) for the design details. The calculations confirm that intercepting and retaining 100-year runoff from half the roof area for each lot will reduce flows ranging from 1.65 to 2.07 LPS from the freehold lots, therefore exceeding the minimum 1.25 LPS retention. Conservatively; all the soak-away pits have been designed based on the largest half-roof area.

As noted in the calculations; soak-away pits dimensioned 2m wide x 4m long x 1m deep can accommodate the maximum storage volume required (2.97 cu.m.) to entirely retain 100-year runoff from half the roof area of each lot. The pit sizing is based on soils percolation rates determined by the geo-technical engineer (conservatively using 100 mm/hr).

With the incorporation of the soak-away pits designs; the total 100-year Post-development Flow (to Primate Rd.) is 39.83 LPS which is less than the Pre-development Flow noted above.

In addition, an analysis of the ditches fronting the freehold lots and existing 300mm dia. Culvert fronting the free-hold lots had been completed and provided in Appendix ‘J’. As per the City of Mississauga criteria, driveway culverts are required to have the capacity to convey the flow from a 10 year storm event. The worst case scenario ditch (fronting lot 19) was analyzed under these conditions as the flow through the driveway culverts will govern the flow through the ditch.



The existing 300mm HDPE culvert crossing Wealthy Place has been analyzed under the 50 year storm conditions in accordance with the City's current design standards. The inlet control flow capacity was found to be approximately 0.093m³/s and the outlet control flow capacity was determined to be approximately 0.097m³/s, refer to appendix 'J' for calculations. Since the inlet capacity flows are less than the outlet capacity flows, it therefore governs over outlet control. Under the post-development conditions, the 50 year storm event culvert design flow was calculated to be 0.1477m³/s which is greater than the existing capacity of the culvert.

Twin 250mm diameter HDPE culverts have been proposed to replace the existing 300mm diameter culvert; this will ensure that the 50 year storm event flow can be conveyed through the culvert and a greater depth of granular/asphalt can be placed compared to the existing site conditions. Refer to the Site Grading Plan (DWG# 17-017-03) and the twin HDPE culvert capacity calculation (Appendix 'J') for more detail.

E.1.2. DIXIE ROAD OUTLET (CONDOMINIUM DEVELOPMENT)

The Dixie Road Outlet defines the primary storm water outlet for the proposed development limiting the maximum Site discharge to pre-development levels. Under post-development conditions a total area of 1.1385 ha (includes external) will be captured and controlled internally by the Site storm sewer system and discharged to the existing 300mm dia. storm sewer on Dixie Road. As described in section E.1.1.; drainage from the proposed freehold lots has been reduced to 100-year pre-development level by implementing soak-away pits to capture roof-top drainage.

Given that both the freehold lots and the condominium development drain to the same location further downstream (at crossing of QEW highway) it was determined that over-control of the condominium site to compensate for the freehold lots would achieve the 2-year pre-development criteria for the development as a whole. The excess flow from the freehold lots is



the difference from the 100-yr pre-development to the 2-yr pre-development flow, which is 25.19 LPS. This additional flow from the freehold lots was included as Uncontrolled Flow for the SWM Quantity Analysis of the condominium site thereby reducing the allowable discharge to the Dixie Rd. storm sewer by 25.19 LPS.

The maximum allowable site discharge is limited to the 2-year pre-development discharge of **66.49 lps**. A SWM control system is proposed to provide sufficient quantity control and on-Site storage restricting discharge to the maximum allowable 2-year pre-development level. A 100 mm diameter orifice pipe is proposed at the outlet of the Storm Control Manhole (CTRL STMMH). A controlled discharge of 34.25 lps (over-controlled) will outlet via the orifice into the proposed 300 mm dia. storm sewer and connect to the existing CBMH #22 on Dixie Road. From CBMH #22 the existing 300mm dia. storm sewer drains easterly. In addition, a very minor uncontrolled landscaped area will drain overland directly to Dixie Road having a peak flow of 1.35 lps. Therefore, the total discharge from the Site is 60.79 lps and less than the pre-development flow level.

Please find within Appendix 'J', the Storm Water Management Quantity Analysis (using the modified 'Rationale' method) with the applicable calculations.

Refer to these calculations for details of control, on-site underground storage within the proposed sewer SWM system, and orifice pipe design for the CTRL STMMH. The proposed storm sewer system layout is indicated on the Servicing Plan DWG# 17-017-02.

The maximum storage required during the 100-year storm event is 218.54 cubic metres. For a design head of 1.44 metres, representative of a maximum Top of Water Level (TWL) elevation of 108.83 metres, the underground storage (storm sewer pipe network) within the proposed storm sewer system totals 237.48 cu.m., thereby meeting the storage requirement. As noted previously; to control discharge a standard 100 mm dia. orifice pipe (@ Inv 107.34) is proposed



immediately downstream of CTRL STMMH. Given the top of water level, foundation drainage will discharge to the surface.

E.2. STORMWATER RETENTION MEASURES (LIDs)

Retaining runoff on- site will reduce the runoff volume to the existing drainage systems on Dixie Road and Primate Road. The water balance target for the subject development is based on the following criteria: *the minimum on-site runoff retention requires the proponent to retain all runoff from a small design rainfall event, typically 5 mm through infiltration, evapotranspiration and rainwater reuse.*

E.2.1. GEOTECHNICAL ASSESSMENT

A geotechnical investigation was conducted by Bruce A Brown Associates Limited and the complete report is attached in Appendix 'K'. Please refer to the Report titled 'Geotechnical Investigation for 2116 and 2122 Dixie Road' dated October 4th, 2018. As identified from the five test pits dug, the native soils consist predominately of sandy soils and inherently have high permeability. As noted in the geotechnical report, the sandy soils have superior hydraulic conductivity equal to 5×10^{-5} m/sec or 180 mm/hour, which well exceeds the minimum MOECC requirement of 15 mm/hour. **Low Impact Development (LID) techniques such as sub-surface infiltration trenches and rainwater cisterns will be highly effective for storm water retention.**



E.2.2. WATER BALANCE (CONDOMINIUM DEVELOPMENT, LOTS 1-18)

For our analysis illustrated in appendix 'I', the total volume to be retained on site based on a daily rainfall of 5mm is 43.47 cu.m. In order to meet this target, we have implemented several infiltration and rainwater reuse methods such as rainwater barrels and subsurface infiltration pits.

Rainwater barrels have been designed to capture roof drainage from all condominium lots. As noted above, the minimum capture requirement is 5 mm of daily rainfall; based on an average roof area of 100 square metres, the total storage capacity of the rain barrels on each lot must be 0.45 cu.m. Refer to Appendix 'I' for the rainwater cistern sizing calculation.

The balance of runoff from the condominium site is generated from the private roadway, parking spaces, driveways and soft landscaped areas. All drainage from these areas is captured into the proposed storm sewer / storm water management system (storm sewer pipe network). As noted in previous Section E.1.2. of this report, the underground storage pipes provide the required quantity control storage up to the 100-year event. As infiltration potential is very high for this development given the permeable native sandy soils, a clear stone bed located downstream of the storage pipe network provides the required storage media for the infiltration design. The infiltration bed will be designed to retain 5mm of daily rainfall from the contributing drainage areas. Based on a total drainage area of 6742 square metres, (pavement and landscaped areas), the 5mm daily volume requirement is equal to 17.78 cubic metres. Using an infiltration bed depth of 0.60 metres with a bottom area of 82.50 square metres; the trench volume provided is 49.50 cubic metres. Clear stone storage media is used in the infiltration bed having a void ratio of 0.40. Therefore, the retained water storage volume is 19.80 cubic metres which exceeds the 17.78 cubic metre design volume requirement. Given the potential for pollutants / grit contained in the stormwater being directed to the facility, pre-treatment is provided using an



oil/grit separator manhole immediately upstream of the infiltration bed and is detailed in Section E.3. of this report. It should be also noted that infiltration systems are recommended by the MOECC to be a minimum of 1 metre above groundwater or bedrock levels. The infiltration bed is at a bottom elevation of 106.82 metres while the measured groundwater as confirmed in the Geotechnical Investigation is at an approximate elevation of 106.2 metres. Due to the site constraints, this elevation difference is less than the 1 metre recommendation. The geotechnical engineer further advises the 1 metre minimum preferred criteria is not crucial given the properties of the native sandy soils. The highly permeable soils reduce potential for mounding of groundwater below the infiltration bed and provide long-term quality benefits being a highly effective filter media. Refer to Appendix 'I' for the infiltration Quantity Analysis - Infiltration Bed Design.

As indicated in the calculations, the 5 mm Daily Rainfall volume for the condominium lots is **43.47 cu.m.** Based on the characteristics of various surface areas (initial abstraction) roof drainage capture and soak-away pit capacity, a total daily retained volume of **49.74 cu.m.** is achieved for these lots. Therefore, **114.4 % (49.74 / 43.47)** of the average daily rainfall, which corresponds to **5.72 mm**, will be retained on-site. **The minimum on-site water retention target of 5 mm will be achieved under post-development conditions.**

E.2.3 WATER BALANCE (FREE - HOLD LOTS, LOTS 19 – 26)

For our analysis illustrated in appendix 'I', the total volume to be retained on site based on a daily rainfall of 5mm is 12.29 cu.m. In order to meet this target, we have implemented several infiltration and rainwater reuse methods such as rainwater barrels and subsurface soak-away pits.

The front year subsurface soak-away pits outlined in section E.1.1., will retain the drainage from



the front half of the roofs for lots 19-26. We have conservatively assumed the soak-away pits will easily capture 15mm of rain runoff from the front half of the roofs yielding a retention volume of 5.70 cu.m. The capacity available with the soak-away pits is 25.60 cu.m.

Rainwater barrels have been designed to capture the remaining rear roof drainage from all freehold lots fronting Primate Rd. As noted above, the minimum capture requirement is 5 mm of daily rainfall; as the half roof areas vary in size, we have conservatively designed the rainwater barrels based on the largest half roof area of 58.40 sq.m. Therefore, to capture 5mm of the daily rainfall, the total storage capacity of the rain barrels on each lot must be 0.26 cu.m. Refer to Appendix 'I' for the rainwater barrel sizing calculation.

As described above, run-off from roof areas is retained; however the balance of the lot areas including soft landscaped areas (lawns) and driveways will drain overland to Primate Road. To confirm that the Water Balance target of 5mm is achieved for the free-hold lots, the percentage volume of daily rainfall that will be retained on-site under post-development conditions requires an analysis of the drainage patterns, surface conditions and implemented retention measures (i.e. soft landscaping, and rainwater barrels). Refer to Appendix 'I' for the Water Balance calculation for the Free-hold lots (Lots 19-26). As indicated in the calculations, the 5 mm Daily Rainfall volume for the freehold lots is **12.29 cu.m.** Based on the characteristics of various surface areas (initial abstraction) roof drainage capture and soak-away pit capacity, a total daily retained volume of **14.56 cu.m.** is achieved for these lots. Therefore, **118.5 % (14.56 / 12.29)** of the average daily rainfall, which corresponds to **5.92 mm**, will be retained on-site. **The minimum on-site water retention target of 5 mm will be achieved under post-development conditions.**



E.3. STORMWATER QUALITY CONTROL

As per e-mail correspondence with the City, no quality control will be required, see Appendix 'H'. However, given that the infiltration bed will receive storm water from pavement and soft landscaped areas that may contain pollutants / grit; pretreatment is highly recommended.

Oil / Grit Separator Manhole

As indicated on the Servicing Plan we have proposed installation of an oil / grit separator manhole as a pretreatment measure. A CDS unit, **CDS20-20 m** will be installed upstream of the infiltration bed and downstream of the site storm system capturing drainage from the condominium development site.

The **CDS20-20m** manhole has been sized according to the **site drainage area of 1.1523 hectares** for Level 1 (Enhance Protection) quality control (min. 80% TSS removal), as required by the Credit Valley Conservation Authority (CVC).

The manufacturer/supplier provided sizing verification. The output file printout is attached in Appendix 'I' for reference. As noted, o **CDS20-20m** provides **83.0% annual TSS removal and treats 98% of annual runoff volume**. A cross-sectional detail of the model, also provided by the manufacturer, is shown on the engineering drawing #17-017-09.



F.0. EROSION AND SEDIMENT CONTROLS (ESC)

Prior to the Building Construction Program, the on-site sediment controls for the impoundment and filtering of the sediment-laden flow shall consist of the following measures:

A siltation control fence shall be installed along the entire perimeter of the development lands. This will control the quality of runoff and localize the areas of intense erosion and sedimentation.

Construction access mud-mat will be installed to minimize the transportation of on-site soils onto existing municipal roads (i.e.: limit mud-tracking). Filter fabric shall be wrapped around all proposed catch-basin and rear-lot catchbasin lids in accordance with approved details. The proposed catchbasins shall be constructed with 0.60 meter sumps. Salt and sand from winter road maintenance, silt and other debris washed into the catchbasins will be collected in the sump areas instead of entering the storm conveyance system. For details on the proposed ESC measures, refer to DWG's 17-017-07 and 08: Erosion Sedimentation Control Plan Stage I & II respectively.

Regular maintenance and all necessary repairs shall be performed, including the safe disposal of all sediment material. Maintenance, which in most cases will require the removal of sediment and the installation of a new device, shall be conducted when the level of performance of the implemented control device is reduced to less than 40% of its initial capacity based on the engineer's observation.



G.0. CONCLUSIONS AND RECOMMENDATIONS

In summary, the existing municipal services are such that they can support the subject development. On the basis of our investigation and examination, it is the conclusion of the writer that:

- The subject development can be drained for sanitary sewage purposes.
- The existing municipal water supply can adequately service the subject development.
- Adequate storm drainage and storm water management facilities qualitative can be provided within the subject development area to neutralize the impact of urbanized runoff.
- No additional storm runoff shall be conveyed from the subject lands to Dixie Road.
- The first 5mm of daily rainfall will be retained on-site.

The existing municipal services are such that they can support the subject development.

Respectfully Submitted:

CONDELAND ENGINEERING LTD.

Consulting Engineers and Project Manager




Robert DeAngelis, P.Eng
Principal

Jonathan Kapitanchuk, B.Eng
Intermediate Designer

APPENDIX 'A'

- KEY MAP

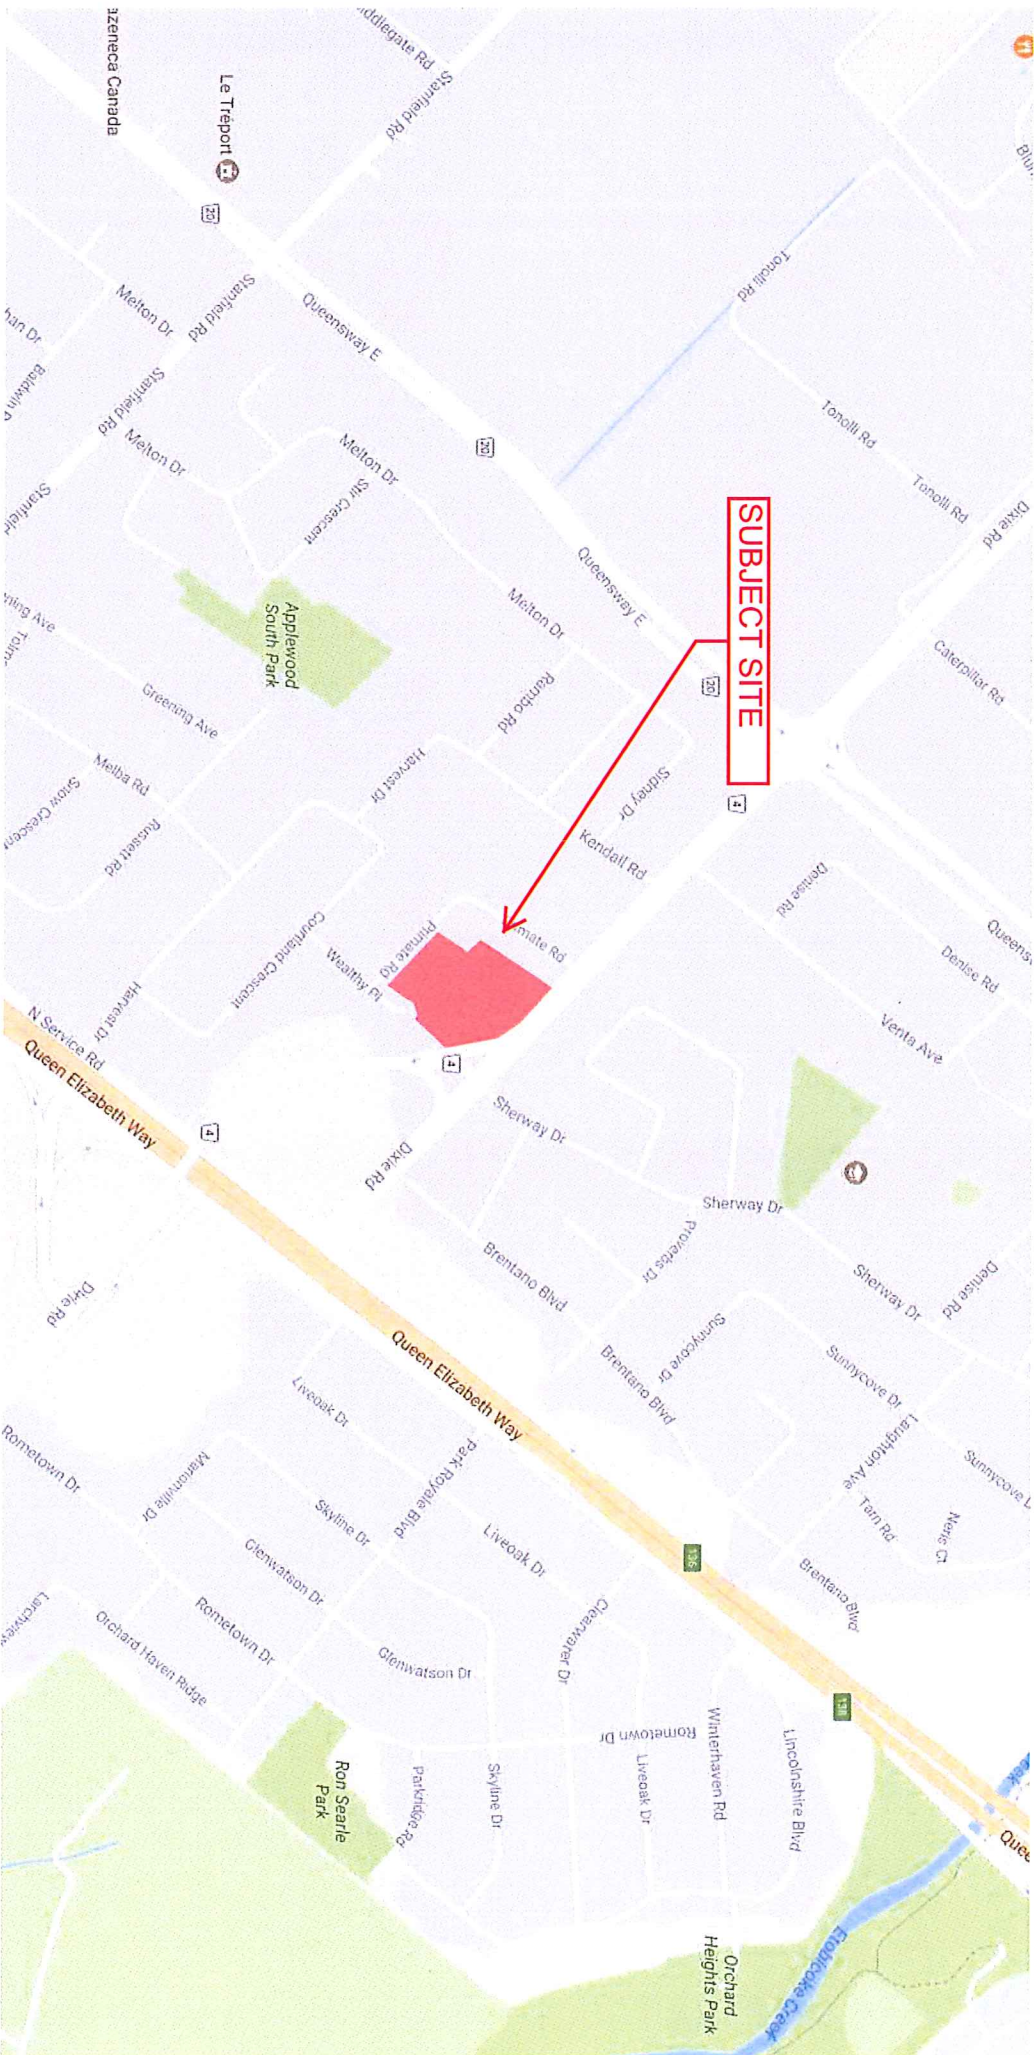


KEY MAP N.T.S.



APPENDIX 'B'

- CREDIT VALLEY CONSERVATION WATERSHED MAP

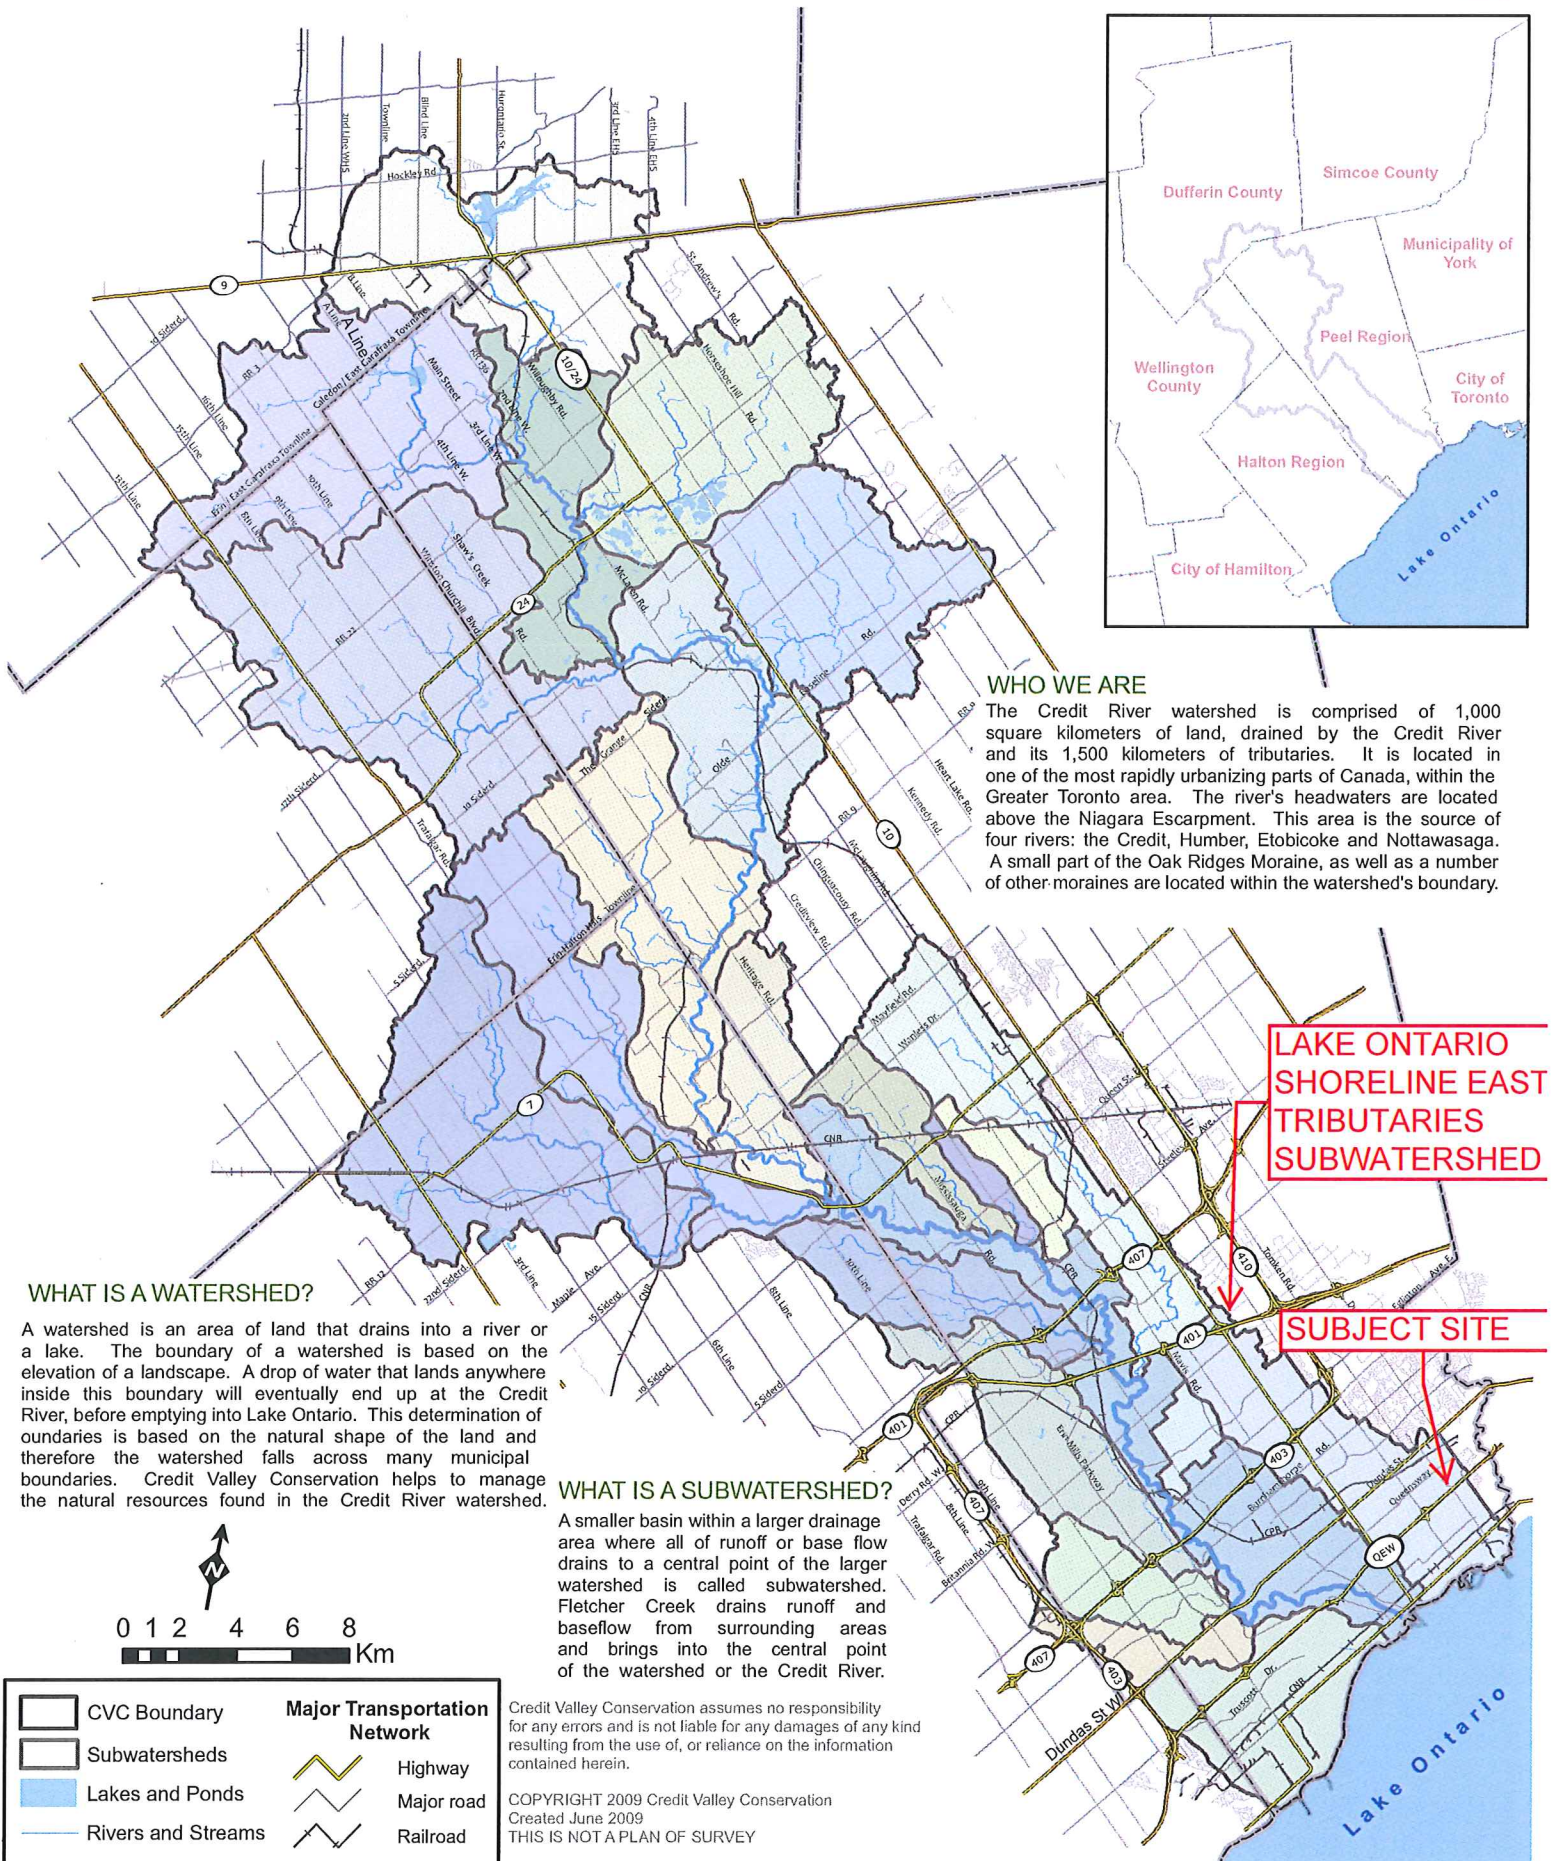



APPENDIX 'C'

- Topographic Survey

PLAN OF SURVEY SHOWING TOPOGRAPHY OF
LOTS 26, 27, 28, 29, 30 AND 31 AND
PART OF LOT 18
REGISTERED PLAN 473 AND
PART OF LOT 6, CONCESSION 1
SOUTH OF DUNDAS STREET
(GEOGRAPHIC TOWNSHIP OF TORONTO)
CITY OF MISSISSAUGA
REGIONAL MUNICIPALITY OF PEEL

SCALE 1:200
RADI-PENTEK & EDWARD SURVEYING LTD., O.L.S.
METRIC
DISTANCES AND BEARINGS SHOWN ON THIS PLAN ARE IN METERS
AND ARE TO BE CONSIDERED AS PART OF RECORD OF SURVEY

SURVEYOR'S CERTIFICATE
I HEREBY CERTIFY THAT
1. THIS SURVEY AND PLAN ARE CORRECT AND IN ACCORDANCE WITH THE
MISCELLANEOUS PROVISIONS OF THE SURVEY ACT AND THE LAND TITLES ACT AND
THE REGULATION THEREUNDER.
2. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
DATE _____, 2017

RADI-PENTEK & EDWARD SURVEYING LTD.

NOTES
1. ALL DISTANCES ARE IN METERS.
2. ALL BEARINGS ARE IN DEGREES, MINUTES AND SECONDS.
3. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
4. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
5. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
6. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
7. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
8. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
9. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
10. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
11. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
12. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
13. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
14. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
15. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
16. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
17. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
18. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
19. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
20. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
21. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
22. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
23. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
24. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
25. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
26. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
27. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
28. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
29. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
30. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
31. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
32. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
33. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
34. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
35. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
36. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
37. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
38. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
39. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
40. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
41. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
42. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
43. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
44. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
45. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
46. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
47. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
48. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
49. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
50. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
51. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
52. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
53. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
54. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
55. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
56. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
57. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
58. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
59. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
60. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
61. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
62. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
63. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
64. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
65. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
66. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
67. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
68. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
69. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
70. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
71. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
72. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
73. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
74. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
75. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
76. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
77. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
78. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
79. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
80. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
81. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
82. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
83. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
84. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
85. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
86. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
87. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
88. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
89. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
90. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
91. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
92. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
93. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
94. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
95. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
96. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
97. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
98. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
99. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
100. THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.

BEARING NOTE
BEARINGS ARE GIVEN, UNLESS OTHERWISE SPECIFIED, FROM
THE SURVEYED LINE TO THE POINT OF INTEREST.
DISTANCE NOTE
DISTANCES ARE GIVEN, UNLESS OTHERWISE SPECIFIED, IN METERS.
BENCHMARK NOTE
THE SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.
CAUTION
THIS SURVEY WAS COMPLETED ON THE _____ DAY OF _____, 2017.



rpe RADI-PENTEK & EDWARD SURVEYING LTD.
1000 SHEPPARD AVENUE EAST, SUITE 100
MISSISSAUGA, ONTARIO L4X 1L7
TEL: (905) 276-1111 FAX: (905) 276-1112
WWW.RPE-SURVEYING.COM
RADI-PENTEK & EDWARD SURVEYING LTD.
1000 SHEPPARD AVENUE EAST, SUITE 100
MISSISSAUGA, ONTARIO L4X 1L7
TEL: (905) 276-1111 FAX: (905) 276-1112
WWW.RPE-SURVEYING.COM



APPENDIX 'D'

**- E-Mail Correspondence with Region of Peel
With Regards to**

Watermain Distribution Modelling

Dated November 3, 2017

11/6/2017

Condeland Engineering Limited Mail - City Park (Dixie) Inc. - Watermain Connection Site Plan



Steven Nguyen <steven@condeland.com>

City Park (Dixie) Inc. - Watermain Connection Site Plan

Clark, Carol <carol.clark@peelregion.ca>

Fri, Nov 3, 2017 at 2:18 PM

To: Steven Nguyen <steven@condeland.com>

Cc: "Sniatenchuk, Bernadette" <bernadette.sniatenchuk@peelregion.ca>, "Frandsen, Iwona" <iwona.frandsen@peelregion.ca>

Good Afternoon Steven,

This site has not been circulated to the Region of Peel, for Site Plan approval and therefore is premature for Site Plan Servicing review. We were also recently requested to provide modelling for this site and advised that Site Plan circulation is required, per the attached email.

With the future Site Servicing Submission, please include the non-refundable \$400 First Submission application fee as per current fee by-law 60-2016. Payment shall be in the form of a certified Cheque, money order or bank draft and made payable to the Region of Peel. All fees may be subject to change on annual basis pending Council approval. Once your application is received, it will be forwarded to a Servicing Technical Analyst for review and comments.

Please Refer to the most current Region of Peel Standards and Design Criteria per the links below. This will assist you with your servicing layout. Servicing for the proposed development must comply with the Local Municipality's Requirements for the Ontario Building Code and most current Region of Peel standards.

Complete Public Works Design, Standards Specification & Procedures Manual: <http://www.peelregion.ca/pw/other/standards/>

Water Design Criteria: <http://www.peelregion.ca/pw/other/standards/linear/design/pdfs/water-design.pdf>

Sanitary Sewer Design Criteria: <http://www.peelregion.ca/pw/other/standards/linear/design/pdfs/sani-sewer.pdf>

Storm Sewer Design Criteria: <http://www.peelregion.ca/pw/other/standards/linear/design/pdfs/sewer-design.pdf>

For location of existing water and sanitary sewer Infrastructure please contact Records at 905-791-7800 extension 7882 or by e-mail at

PWServiceRequests@peelregion.ca.

Please note that Site Servicing approvals are required prior to the local municipality issuing Building Permit.

Regards,

11/6/2017

Condeland Engineering Limited Mail - City Park (Dixie) Inc. - Watermain Connection Site Plan

Carol Clark
Supervisor, Site Plan Servicing
Engineering, Development Services
Public Works

(905) 791-7800 ext. 7838
(905) 791-1442
carol.clark@peelregion.ca



From: Steven Nguyen [mailto:steven@condeland.com]
Sent: November 3, 2017 10:04 AM
To: Clark, Carol
Subject: City Park (Dixie) Inc. - Watermain Connection Site Plan

[Quoted text hidden]

----- Forwarded message -----

From: "Clark, Carol" <carol.clark@peelregion.ca>
To: "Kumar, Abhi" <Abhi.Kumar@wsp.com>, "Sniatenchuk, Bernadette" <bernadette.sniatenchuk@peelregion.ca>
Cc:
Bcc:
Date: Fri, 20 Oct 2017 14:47:21 +0000
Subject: RE: FW: Hydraulic Model Request

Good Morning Abhi,

Thank you, the information you provided is very helpful.

During the Pre-consultation (application number DARC 17-192) comments were provided that modelling will be done with the Plan of Subdivision through the receipt of a Functional Servicing Report. Please refer to the attached link for Functional Servicing Report criteria: <http://www.peelregion.ca/pw/other/standards/linear/reports/pdfs/swm-fsr-final-july2009.pdf>

We require this report before we can conduct the modelling. If you provide the report and the Subdivision application number, we will review the report and if it is satisfactorily completed, we will forward it for modelling.

Sincerely,

Carol Clark
Supervisor, Site Plan Servicing
Engineering, Development Services
Public Works

(905) 791-7800 ext. 7838
(905) 791-1442
carol.clark@peelregion.ca



11/6/2017

Condeland Engineering Limited Mail - City Park (Dixie) Inc. - Watermain Connection Site Plan

From: Kumar, Abhi [mailto:Abhi.Kumar@wsp.com]

Sent: October 20, 2017 9:50 AM

To: Clark, Carol

Subject: Re: FW: Hydraulic Model Request

Hey Carol,

Please see my answers highlighted below; I have also attached a site plan for your perusal.

Please let me know if any other info. is needed. Thanks.

- Site Plan number and/or Plan of Subdivision number or any other Planning application number associated with your development

DARC 17-192

- Site address and/or legal description

2103-2119 Primate Road, 1351 & 1357 Wealthy Place, 2116 & 2112 Dixie Road, Mississauga (see attachment)

- Connection points and sizes to Peel's infrastructure

150mm dia. PVC connection to Primate Road, see attach preliminary servicing plan.

- Type of residential development i.e. single family dwelling, townhouses etc.

8 single detach freehold units and 18 potts single detach.

Thanks,

Abhi

Abhishek Kumar, MSc, EIT

Engineering Intern

Hydraulics



T+ 1 905-882-1100 #6475

100 Commerce Valley Drive W

Thornhill, Ontario,

L3T 0A1, Canada



APPENDIX 'E'

- Servicing Plan

- Grading Plan

A) PLANNING AND BUILDING DEPARTMENT

I) "I HEREBY CERTIFY THAT THIS DRAWING CONFORMS IN ALL RESPECTS TO THE SITE DEVELOPMENT PLANS AS APPROVED BY THE CITY OF MISSISSAUGA UNDER FILE NUMBER _____"

II) "THE CITY OF MISSISSAUGA REQUIRES THAT ALL WORKING DRAWINGS SUBMITTED TO THE BUILDING DIVISION AS PART OF AN APPLICATION FOR THE ISSUANCE OF A BUILDING PERMIT SHALL BE CERTIFIED BY THE ARCHITECT OF ENGINEER AS BEING IN CONFORMITY WITH THE SITE DEVELOPMENT PLAN AS APPROVED BY THE CITY OF MISSISSAUGA."

III) "GRADES WILL BE MET WITHIN A 33% MAXIMUM SLOPE AT THE PROPERTY LINES AND

IV) "THE STRUCTURAL DESIGN OF ANY RETAINING WALL OVER 0.60M IN HEIGHT OR ANY RETAINING WALL LOCATED ON A PROPERTY LINE IS TO BE SHOWN ON THE SITE GRADING PLAN FOR THIS PROJECT AND IS TO BE APPROVED BY THE CONSULTING ENGINEER FOR THE PROJECT."

CONSTRUCTION & RESTORATION WORKS FOR MUNICIPAL R.O.W.s.
PRIMATE ROAD, WEALTHY PLACE AND DIXIE ROAD

1. PROPOSED STORM, SANITARY, AND WATER CONNECTIONS WITHIN EXISTING MUNICIPAL R.O.W.s ARE TO BE BACKFILLED WITH UNSHRINKABLE FILL UP TO BASE OF EXISTING ROAD GRANULAR. EXISTING ROAD GRANULAR AND ASPHALT TO BE MATCHED WITH MINIMUM THICKNESS IN ACCORDANCE WITH CITY STANDARD 2220.03.

2. TRENCH CONSTRUCTION / RESTORATION SHALL BE IN ACCORDANCE WITH CITY STANDARDS 2220.03, 2220.031, AND 2220.032.

3. BOULEVARD AREAS SHALL BE RESTORED TO EXISTING CONDITIONS OR BETTER WITH MIN 150mm THICK TOPSOIL +No.1 NURSERY SOD.





CATCH BASIN DATA		NOTE:
NAME	TOP ELEVATION	
CB1	109.67	PROPOSED WATERMAIN DEPTH SHALL BE THE STANDARD 1.70m BELOW CENTERLINE OF ROADWAY EXCEPT AT CROSSING LOCATIONS WHERE DEPTH IS SPECIFIED
CB2	109.70	
CB3	109.20	NOTE:
CB4	109.06	
CB5	109.31	EXISTING CULVERTS TO BE REMOVED
CB6	109.31	
DCB1	108.83	NOTE:
DCB2	108.83	
		ALL STORM SEWERS 675mm DIA. AND GREATER TO HAVE 450mm DIA. REDUCER INSTALLED AT MH AS PER DETAIL DWG 17-017-09

SANITARY MANHOLE DATA				
SANMH#	PARAMETRES	TOP ELEVATION	IN INVERT	OUT INVERT
EX.SANMH	(1200mm Dia) OPSD 701.010	108.81	N.105.18	EX. S.105.08
SANMH1A	(1200mm Dia) OPSD 701.010	108.95	NW.105.503	SE.105.428
SANMH2A	(1200mm Dia) OPSD 701.010	109.04	W.105.887	S.105.822
SANMH3A	(1200mm Dia) OPSD 701.010	109.13	W.106.131	E.106.047
SANMH4A	(1200mm Dia) OPSD 701.010	109.50	N.106.762	E.106.672
SANMH5A	(1200mm Dia) OPSD 701.010	110.26		S.107.342
SANMH6A	(1200mm Dia) OPSD 701.010	109.09	N.106.151	SE.106.044
SANMH7A	(1200mm Dia) OPSD 701.010	109.22		S.106.453

STORM MANHOLE DATA				
STMMH#	PARAMETRES	TOP ELEVATION	IN INVERT	OUT INVERT
STMMH1	(1200mm Dia) OPSD 701.010	110.26		S.107.757
STMMH2	(1200mm Dia) OPSD 701.010	109.55	N107.617 W.108.000	E.107.617
STMMH3	(1200mm Dia) OPSD 701.010	109.16	W.107.493	E.107.493
STMMH4	(1200mm Dia) OPSD 701.010	108.91		NW.107.492
STMMH5	(1200mm Dia) OPSD 701.010	109.24	NW.107.521	S.107.521
STMMH6	(1200mm Dia) OPSD 701.010	109.13	N.107.471	SE.107.471
STMMH7	(1200mm Dia) OPSD 701.010	109.80	SE.108.050	SW.108.110
STMMH8	(1200mm Dia) OPSD 701.010	109.02	W.107.404	NE.107.404
STMMH9	(1200mm Dia) OPSD 701.010	109.95		SE.107.653
STMMH10	(1200mm Dia) OPSD 701.010	110.01		SE.107.658
STMMH11	PRECAST RECT. (3000x1800)	109.38	NW.107.546	SE.107.546
CTRLMH	(1200mm Dia) OPSD 701.010	109.18	SE.107.360	NE.107.340
CDSMH	(1200mm Dia) OPSD 701.010	109.00	N.107.450 W.107.450	E.107.411

NOTE:
FOR MODEL CDS20_20m
SEE DETAIL DWG 17-021-09

CROSSINGS			
No	BOTTOM OF PIPE	OBVERT	CLEARANCE(m)
1	STM INV 107.32	SAN OBV 106.15	1.17
2	STM INV 107.35	WM OBV 106.85	0.50
3	WM INV 107.20	SAN OBV 106.25	0.95
4	STM INV 107.96	WM OBV 107.46	0.50

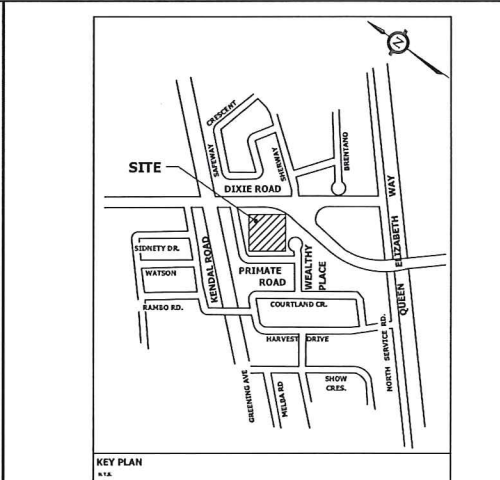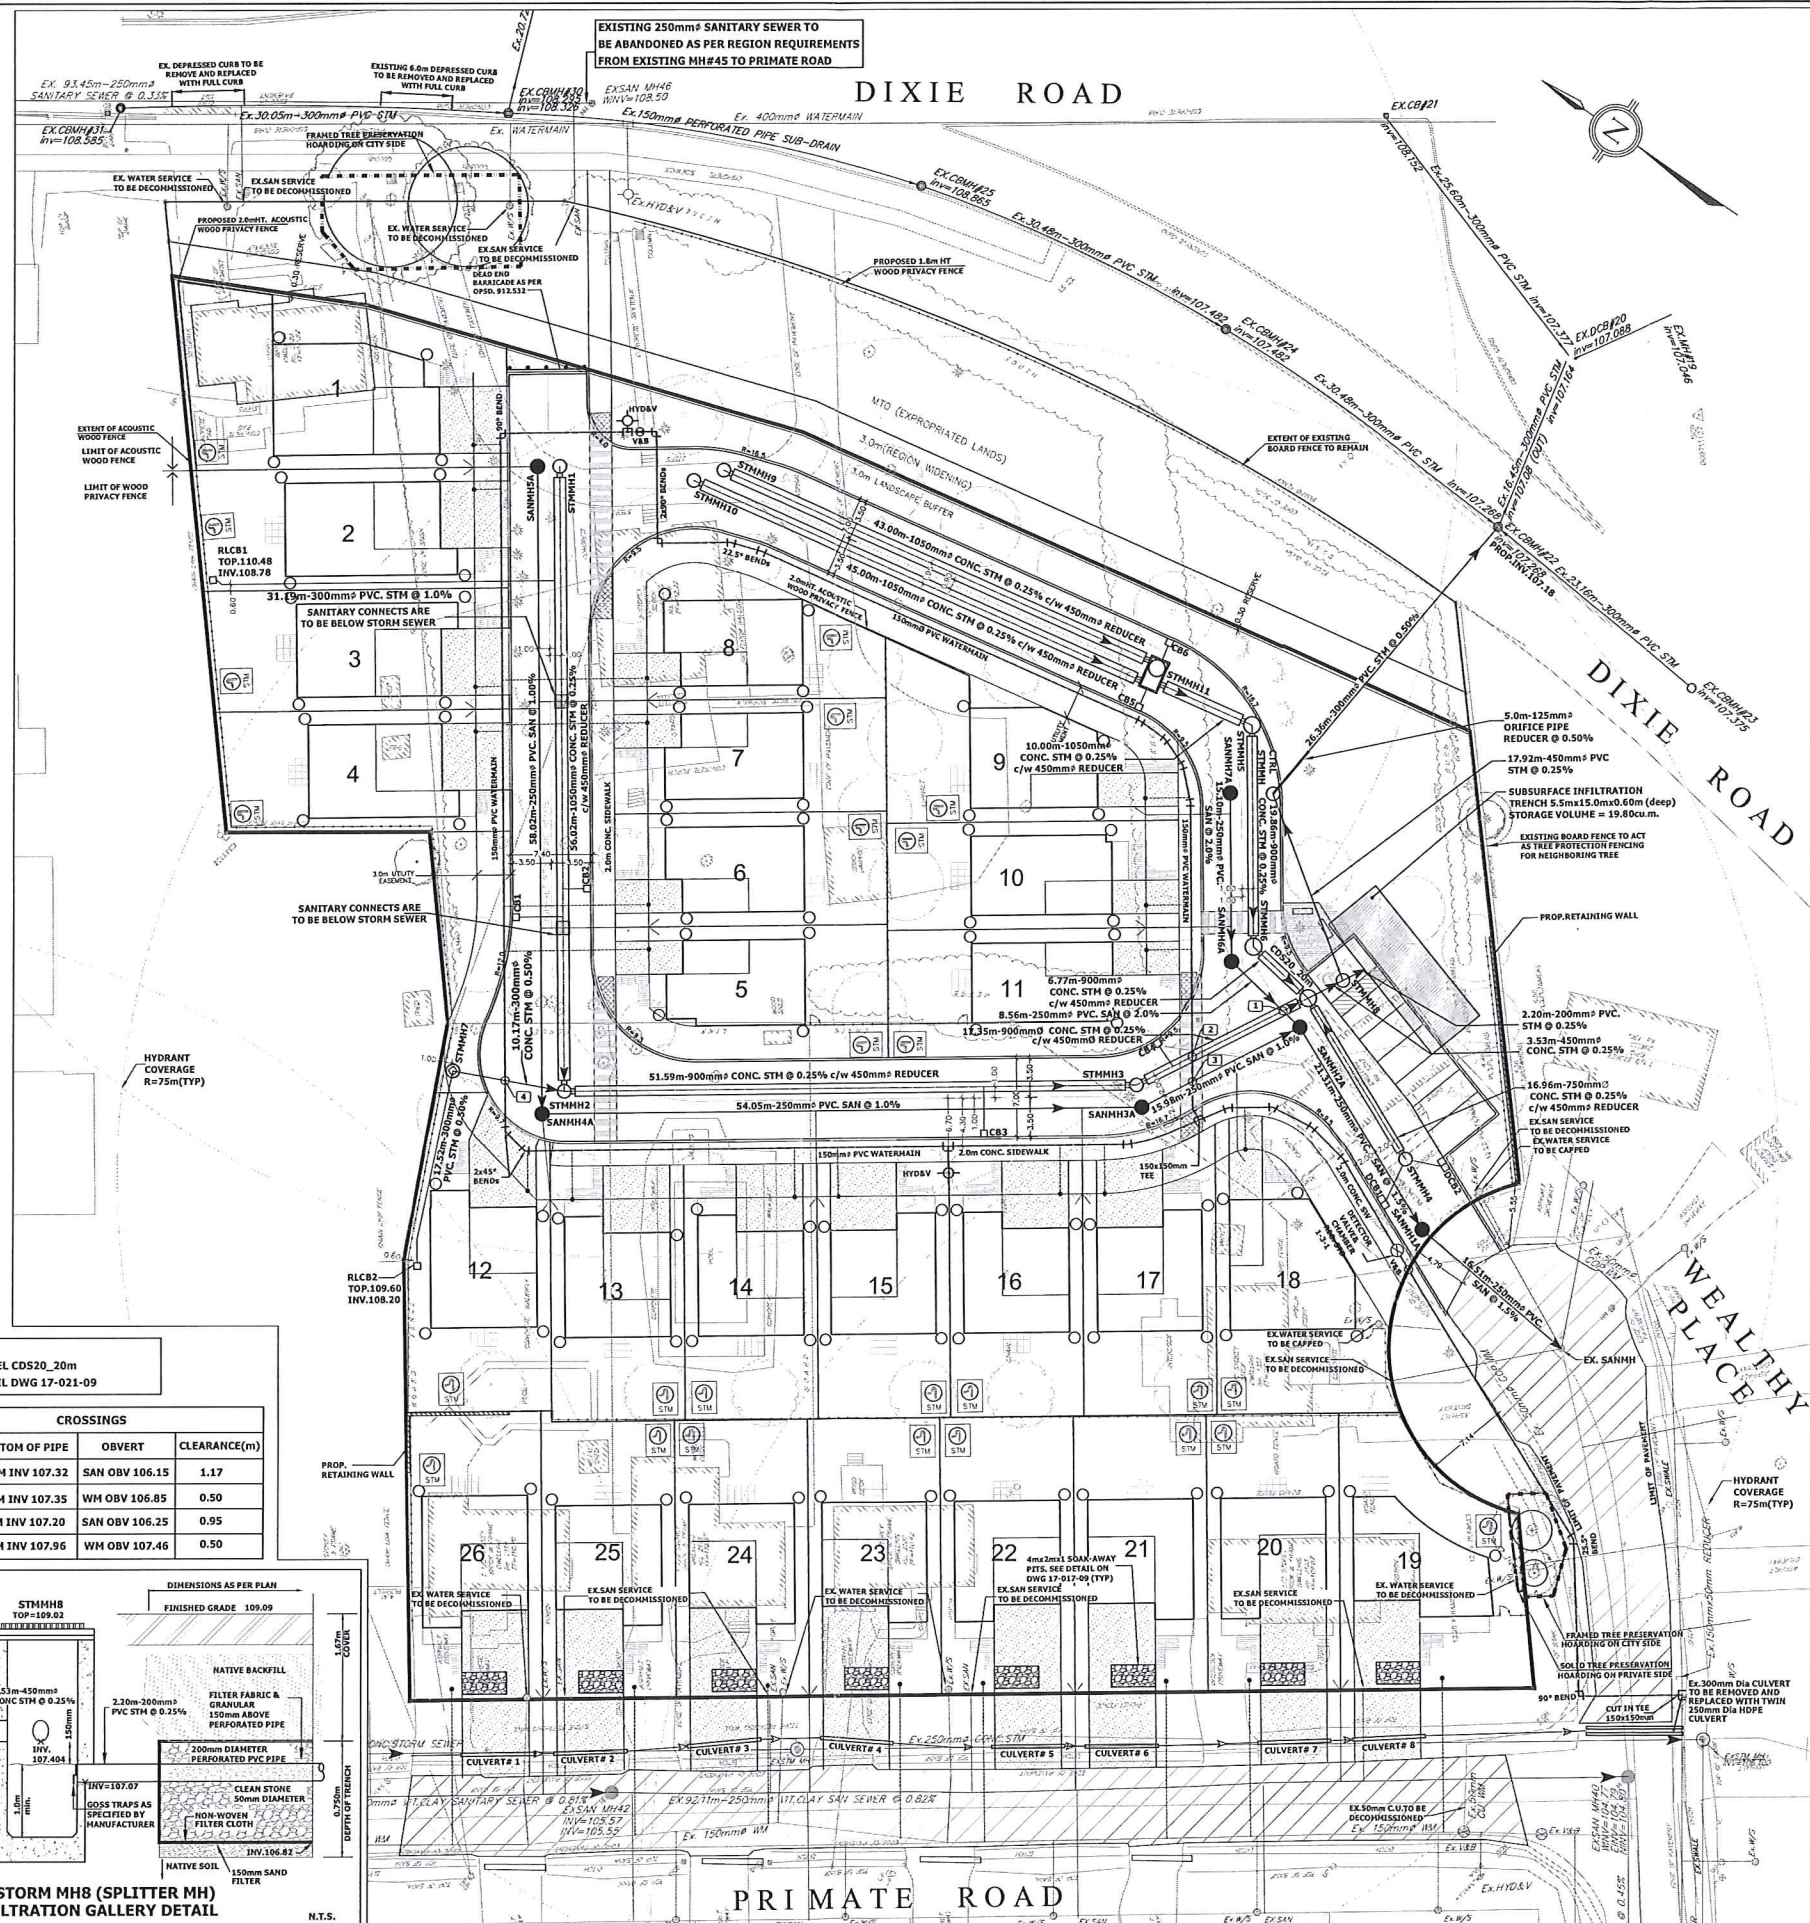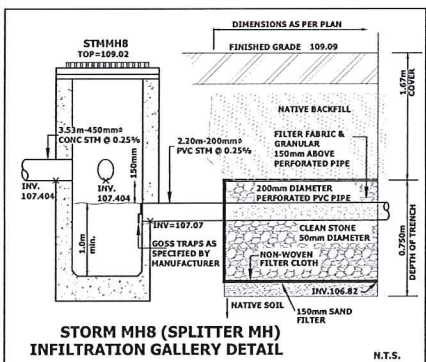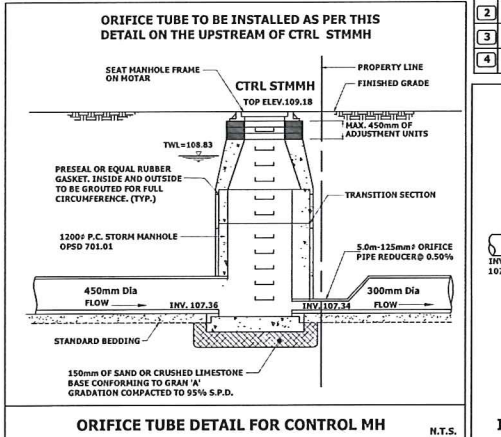

PLAN OF SURVEY SHOWING TOPOGRAPHY OF LOTS 26, 27, 28, 29, 30 AND 31 AND PART OF LOT 18
REGISTERED PLAN 473 AND PART OF LOT 6, CONCESSION 1 SOUTH OF DUNDAS STREET
(GEOGRAPHIC TOWNSHIP OF TORONTO)
CITY OF MISSISSAUGA REGIONAL MUNICIPALITY OF PEEL

LEGEND	
VC VALVE AND CHAMBER	EXISTING CULVERT
VB VALVE AND BOX	PROPOSED CULVERT
EXISTING MANHOLE	150mm PVC WATERMAIN
PROPOSED STH MANHOLE	PROPOSED SAN SERVICE
PROPOSED SAN MANHOLE	PROPOSED 19mm WATER SERVICE AND CURB STOP
PROPOSED CATCHBASIN	PROPOSED DITCH
PROPOSED FIRE HYDRANT	EXISTING DITCH
SUMP PUMP DISCHARGE TO SURFACE	PROPOSED CENTERLINE/STA
LIMIT OF BOUNDARY	LOT LINE
HYD. HYDRANT 75m RADIUS COVERAGE CONFIRMATION	TACTILE SURFACE
COMMUNITY MAIL BOX	RETAINING WALL
SOLID TREE PROTECTION HOARDING	CROSSING DATA SEE DETAIL THIS PAGE
FRAMED TREE PROTECTION HOARDING	PROPOSED SOAKAWAY PIT
	PROPOSED RAINFALL BARREL

BENCHMARK NOTE
ELEVATIONS SHOWN HEREON ARE REFERRED TO THE CITY OF MISSISSAUGA BENCHMARK No. 351 HAVING AN ELEVATION OF 108.675 METRES LOCATED ON THE EAST FACE AT THE MAIN ENTRANCE OF APPLEWOOD PUBLIC SCHOOL ON THE WEST SIDE OF HARVEST DRIVE, 30.5 METRES SOUTH OF KENDALL ROAD.

REVISION BLOCK	DATE	APPR. BY
1.	FIRST SUBMISSION	JAN.09/2018 S.Mg.
2.	CITY COMMENTS FROM APRIL 26, 2019	AUG. 08/2019 M.E.H.
3.	CITY COMMENTS FROM DECEMBER 10, 2018	MARCH 06/2019 M.E.H.
4.	CITY COMMENTS FROM AUGUST 8, 2018	OCT.16/2018 M.E.H.

CITY PARK (DIXIE) INC.
2103-2119 PRIMATE ROAD, 1351 & 1357 WEALTHY PLACE, 2116 & 2112 DIXIE ROAD

APPROVED AS TO FORM IN RELIANCE UPON THE PROFESSIONAL SKILL AND ABILITY OF CONDELAND ENGINEERING LIMITED AS TO DESIGN AND SPECIFICATION

DIRECTOR OF DEVELOPMENT/TRANSPORTATION ENGINEERING
DATE: _____

CONDELAND
CONSULTING ENGINEERS & PROJECT MANAGERS
350 Creditstone Road, Unit 200
Concord, Ontario L4K 3Z2
P: (905) 695-2096
F: (905) 695-2099

SERVICING PLAN		
DESIGNED BY: S.N./J.K.	DATE: AUGUST 2019	CHECKED BY: M.E.H.
DRAWN BY: G.M.	DRAWING NO.	
SCALES	CITY FILE	
HOR 1:300	17-017 - 02	DARC 17-192

1. ALL SURFACE DRAINAGE WILL BE SELF CONTAINED, COLLECTED AND DISCHARGED AT A LOCATION TO BE APPROVED PRIOR TO THE ISSUANCE OF A BUILDING PERMIT.
2. THE PORTIONS OF THE DRIVEWAY WITHIN THE MUNICIPAL BOULEVARD WILL BE PAVED BY THE APPLICANT.
3. ALL EXCESS EXCAVATED MATERIAL WILL BE REMOVED FROM THE SITE
4. THE EXISTING DRAINAGE PATTERN WILL BE MAINTAINED

A) PLANNING AND BUILDING DEPARTMENT



- I) "I HEREBY CERTIFY THAT THIS DRAWING CONFORMS IN ALL RESPECTS TO THE SITE DEVELOPMENT PLANS AS APPROVED BY THE CITY OF MISSISSAUGA UNDER FILE NUMBER _____"
- II) "THE CITY OF MISSISSAUGA REQUIRES THAT ALL WORKING DRAWINGS SUBMITTED TO THE BUILDING DIVISION AS PART OF AN APPLICATION FOR THE ISSUANCE OF A BUILDING PERMIT SHALL BE CERTIFIED BY THE ARCHITECT OR ENGINEER AS BEING IN CONFORMITY WITH THE SITE DEVELOPMENT PLAN AS APPROVED BY THE CITY OF MISSISSAUGA."
- III) "GRADES WILL BE MET WITHIN A 33% MAXIMUM SLOPE AT THE PROPERTY LINES AND
- IV) "THE STRUCTURAL DESIGN OF ANY RETAINING WALL OVER 0.60M IN HEIGHT OR ANY RETAINING WALL LOCATED ON A PROPERTY LINE IS TO BE SHOWN ON THE SITE GRADING PLAN FOR THIS PROJECT AND IS TO BE APPROVED BY THE CONSULTING ENGINEER FOR THE PROJECT."

CONSTRUCTION & RESTORATION WORKS FOR MUNICIPAL R.O.W.s: PRIMATE ROAD AND WEALTHY PLACE


1. PROPOSED STORM, SANITARY, AND WATER BUILDING CONNECTIONS WITHIN EXISTING MUNICIPAL R.O.W.s ARE TO BE BACKFILLED WITH UNSHRINKABLE FILL UP TO BASE OF EXISTING ROAD GRANULAR. EXISTING ROAD GRANULAR AND ASPHALT TO BE MATCHED WITH MINIMUM THICKNESSES IN ACCORDANCE WITH CITY STANDARD 2220.03.
2. TRENCH CONSTRUCTION / RESTORATION SHALL BE IN ACCORDANCE WITH CITY STANDARDS 2220.03, 2220.031, AND 2220.032.
3. BOULEVARD AREAS SHALL BE RESTORED TO EXISTING CONDITIONS OR BETTER.

GRIND AND PAVE 40mm
HL3 ASPHALT OVERLAY
FOLLOWING SERVICING WORKS




ALL PROPOSED DRIVEWAY CULVERTS ARE TO
BE CONSTRUCTED WITH PRECAST HEADWALL



CROSS-SECTION A-A

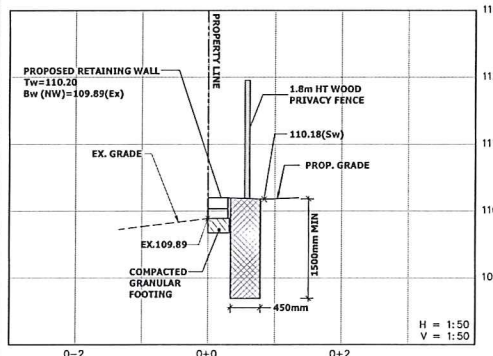


CROSS-SECTION B-B

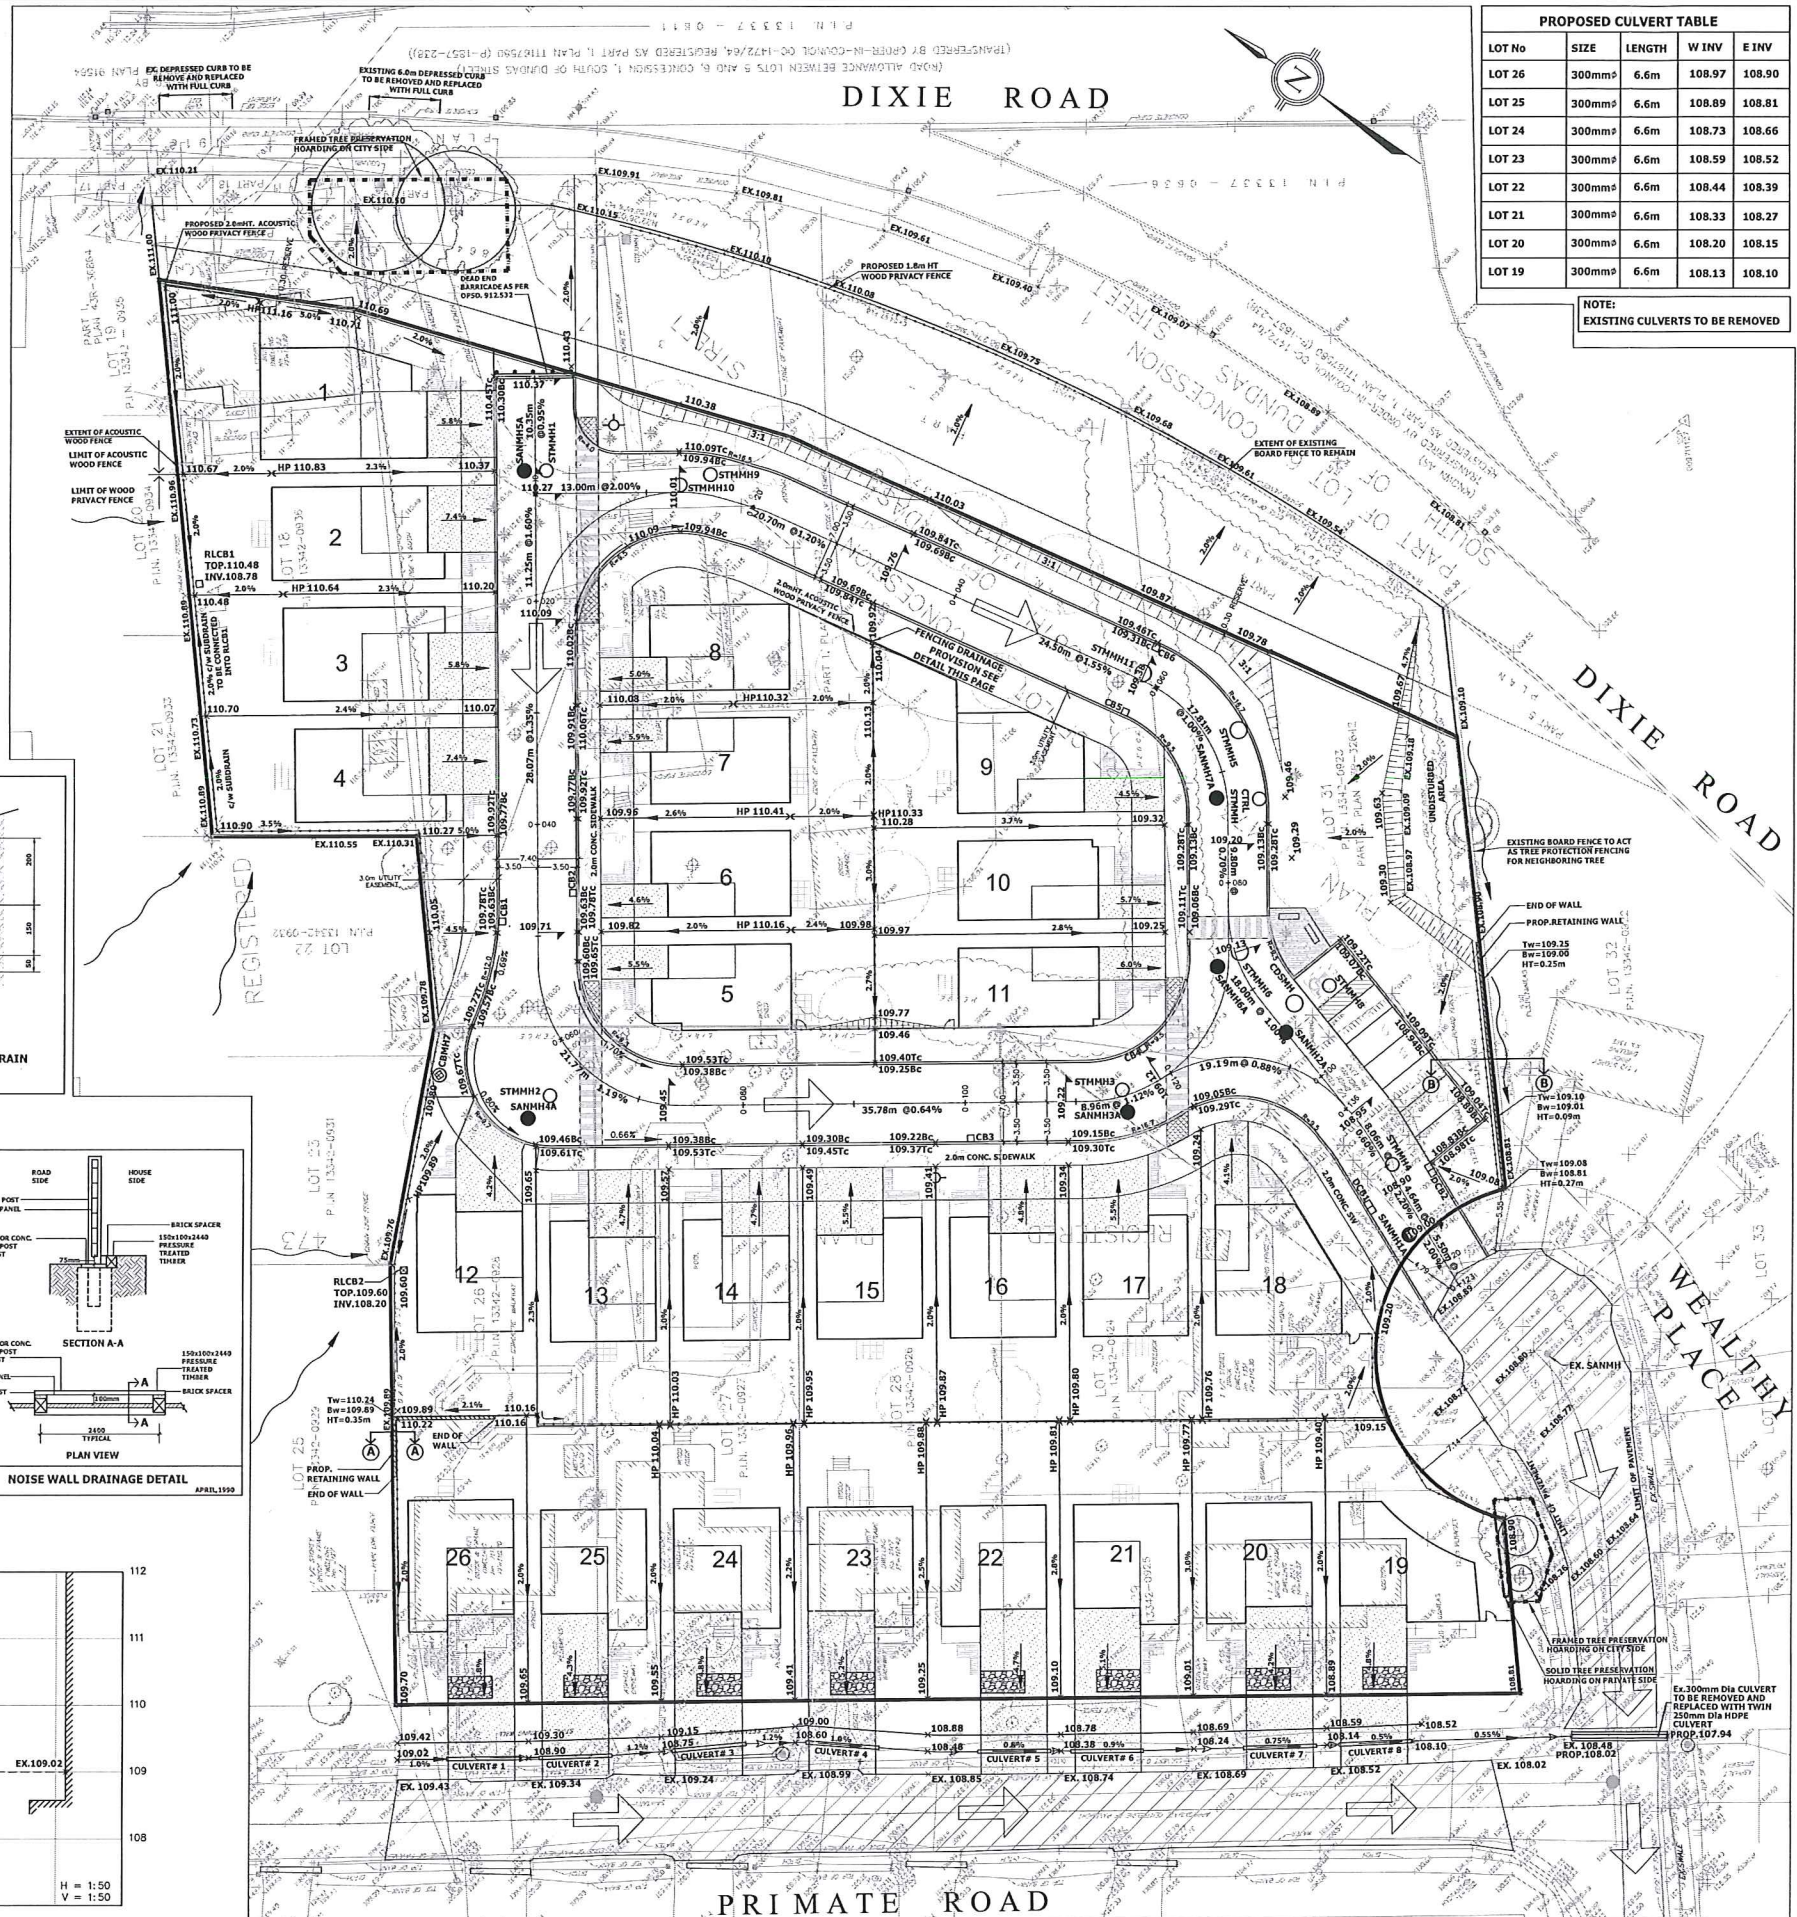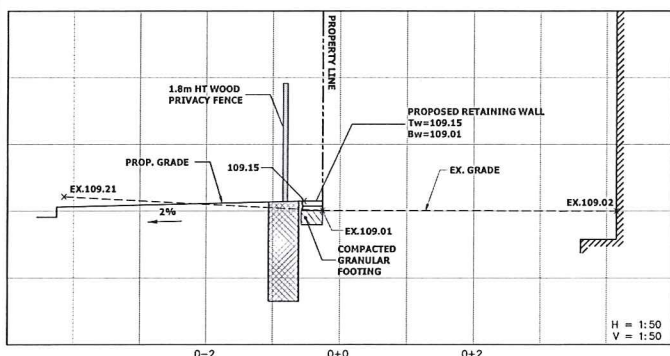

PROPOSED CULVERT TABLE				
LOT No	SIZE	LENGTH	W INV	E INV
LOT 26	300mm	6.6m	108.97	108.90
LOT 25	300mm	6.6m	108.89	108.81
LOT 24	300mm	6.6m	108.73	108.66
LOT 23	300mm	6.6m	108.59	108.52
LOT 22	300mm	6.6m	108.44	108.39
LOT 21	300mm	6.6m	108.33	108.27
LOT 20	300mm	6.6m	108.20	108.15
LOT 19	300mm	6.6m	108.13	108.10

NOTE:
EXISTING CULVERTS TO BE REMOVED

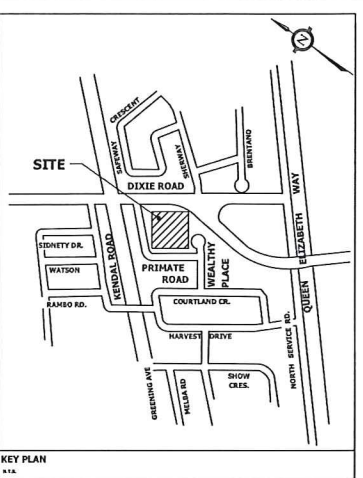

PLAN OF SURVEY SHOWING TOPOGRAPHY OF LOTS 26, 27, 28, 29, 30 AND 31 AND PART OF LOT 18 REGISTERED PLAN 473 AND PART OF LOT 6, CONCESSION 1 SOUTH OF DUNDAS STREET (GEOGRAPHIC TOWNSHIP OF TORONTO) CITY OF MISSISSAUGA REGIONAL MUNICIPALITY OF PEEL

LEGEND

- EXISTING MANHOLE
- PROPOSED STH MANHOLE
- PROPOSED SAN MANHOLE
- PROPOSED CATCHBASIN
- PROPOSED FIRE HYDRANT
- LIMIT OF BOUNDARY
- PROPOSED CHAIN LINK FENCE
- RETAINING WALL
- 3:1 SLOPE
- PROPOSED ELEVATION
- EXISTING ELEVATION
- PROPOSED DRAINAGE ARROW
- EXISTING DRAINAGE PATTERN
- EMERGENCY OVER LAND FLOW ROUTE
- SWALE
- SOLID TREE PROTECTION HOARDING
- FRAMED TREE PROTECTION HOARDING
- PROPOSED SOAKAWAY PIT


BENCHMARK NOTE

ELEVATIONS SHOWN HEREON ARE REFERRED TO THE CITY OF MISSISSAUGA BENCHMARK No. 351 HAVING AN ELEVATION OF 108.675 METRES LOCATED ON THE EAST FACE AT THE MAIN ENTRANCE OF APPLEWOOD PUBLIC SCHOOL ON THE WEST SIDE OF HARVEST DRIVE, 30.5 METRES SOUTH OF KENDALL ROAD.

3.	CITY COMMENTS FROM APRIL 26, 2019	AUG. 08/2019	M.E.H.
4.	CITY COMMENTS FROM DECEMBER 10, 2018	MARCH 06/2019	M.E.H.
2.	CITY COMMENTS FROM AUGUST 8, 2018	OCT.16/2018	M.E.H.
1.	FIRST SUBMISSION	JAN.09.18	S.Ng.
REVISION BLOCK		DATE	APPR. BY

CITY PARK (DIXIE) INC.

2103-2119 PRIMATE ROAD, 1351 & 1357
WEALTHY PLACE, 2116 & 2112 DIXIE ROAD



APPROVED AS TO FORM IN RELIANCE UPON THE PROFESSIONAL SKILL AND ABILITY OF CONDELAND ENGINEERING LIMITED AS TO DESIGN AND SPECIFICATION

DIRECTOR OF DEVELOPMENT/TRANSPORTATION ENGINEERING
DATE:

CONDELAND

CONSULTING ENGINEERS & PROJECT MANAGERS
350 Creditstone Road, Unit 200
Concord, Ontario L4K 3Z2
P: (905) 695-2096
F: (905) 695-2099



GRADING PLAN

DESIGNED BY:	S.N./J.K.	DATE:	AUGUST 2019	CHECKED BY:	M.E.H.
DRAWN BY:	G.M.	DRAWING NO.	17-017-03	CITY FILE	DARC 17-192
SCALES	HOR 1:300				



APPENDIX 'F'
- Sanitary Design Sheet


LOCATION	FROM M.H.	TO M.H.	AREA (ha)	DENSITY (ppha)	POPULATION	CUMULATIVE AREA (ha)	CUMULATIVE POPULATION	PEAKING FACTOR	PEAK DAY FLOW = (7)(8)/192(L/s)	INFILTRATION (L/s)	TOTAL FLOW = (9) + (12) (L/s)	PIPE LENGTH (m)	PIPE DIAMETER (mm)	GRADIENT (%)	FULL FLOW CAPACITY (L/s)	FULL FLOW VELOCITY (m/s)	ACTUAL FLOW VELOCITY (m/s)	UPPER END INVERT (m)	UPPER END MH LOSSES (m)	LOWER END INVERT (m)	PERCENTAGE UTILIZATION (%)	RIM ELEV (M)	COVER TO OBVERT (M)
CITY PARK (DIXIE ROAD) INC. SITE - 2103-2119 PRIMATE RD., 1351 & 1357 WEALTHY PL., 2116 & 2112 DIXIE RD.																							
CITY PARK (DIXIE ROAD) INC. SITE																							
Private Road	MH5A	MH4A	0.3197	50.00	16	0.3197	16	4.00	0.224	1.969	2.193	58.02	250	1.00%	59.41	1.21	0.57	107.342		106.762	3.7%	110.27	2.68
Private Road	MH4A	MH3A	0.2160	50.00	11	0.5357	27	4.00	0.375	3.805	4.181	54.05	250	1.00%	59.41	1.21	0.68	106.672	0.090	106.131	7.0%	109.51	2.59
Private Road	MH3A	MH2A	0.0543	50.00	3	0.5900	30	4.00	0.418	4.543	4.961	15.98	250	1.00%	59.41	1.21	0.72	106.047	0.084	105.887	8.3%	109.14	2.84
Private Road	MH7A	MH6A	0.1881	50.00	9	0.1881	9	4.00	0.132	0.740	0.872	15.10	250	2.00%	84.02	1.71	0.55	106.453		106.151	1.0%	109.22	2.52
Private Road	MH6A	MH2A	0.0540	50.00	3	0.2421	12	4.00	0.170	1.271	1.441	8.56	250	2.00%	84.02	1.71	0.64	106.044	0.050	105.872	1.7%	109.09	2.80
Private Road	MH2A	MH1A	0.0327	50.00	2	0.8648	44	4.00	0.610	6.698	7.308	21.31	250	1.50%	72.77	1.48	0.94	105.822	0.065	105.503	10.0%	108.96	2.89
MUNICIPAL ROAD																							
Wealthy Place	MH1A	EX.MH41			0	0.8648	44	4.00	0.610	7.440	8.050	16.51	250	1.50%	72.77	1.48	0.96	105.43	0.075	105.18	11.1%	108.98	3.30
Wealthy Place	EX.MH41	EX.MH40			0	0.8648	44	4.00	0.610	8.814	9.424	39.07	250	0.77%	52.13	1.06	0.79	105.08	0.100	104.80	18.1%	108.78	3.45
REGION OF PEEL CRITERIA POPULATION DENSITY CRITERIA: Single Detached = 50 persons / ha Dom. Sewage Flows = 302.8 L/cap/day PEAKING FACTOR = $1 + 14/(4+P^{(1/2)})$, (min. 2 - max. 4) WET WEATHER INFILTRATION (area) = 0.2 L/s/ha (manhole)= 0.28 L/s/mh (Sewer)= 0.028 L/s/m						PROJECT: CITY PARK (DIXIE ROAD) INC. CONTRACT NO: 17-017 LOCATION: 2103-2119 PRIMATE RD., 1351 & 1357 WEALTHY PL., 2116 & 2112 DIXIE RD. MISSISSAUGA, ONTARIO CONSULTANT: CONDELAND ENGINEERING LIMITED DESIGNED BY : S.N. CHECKED BY: M.E.H. DATE: August 14, 2019									CITY OF MISSISSAUGA / REGION OF PEEL SANITARY SEWER DESIGN SHEET SHEET 1 OF 1								



APPENDIX 'G'

- External Sanitary Sewer Drainage Plan

Applewood East Acres

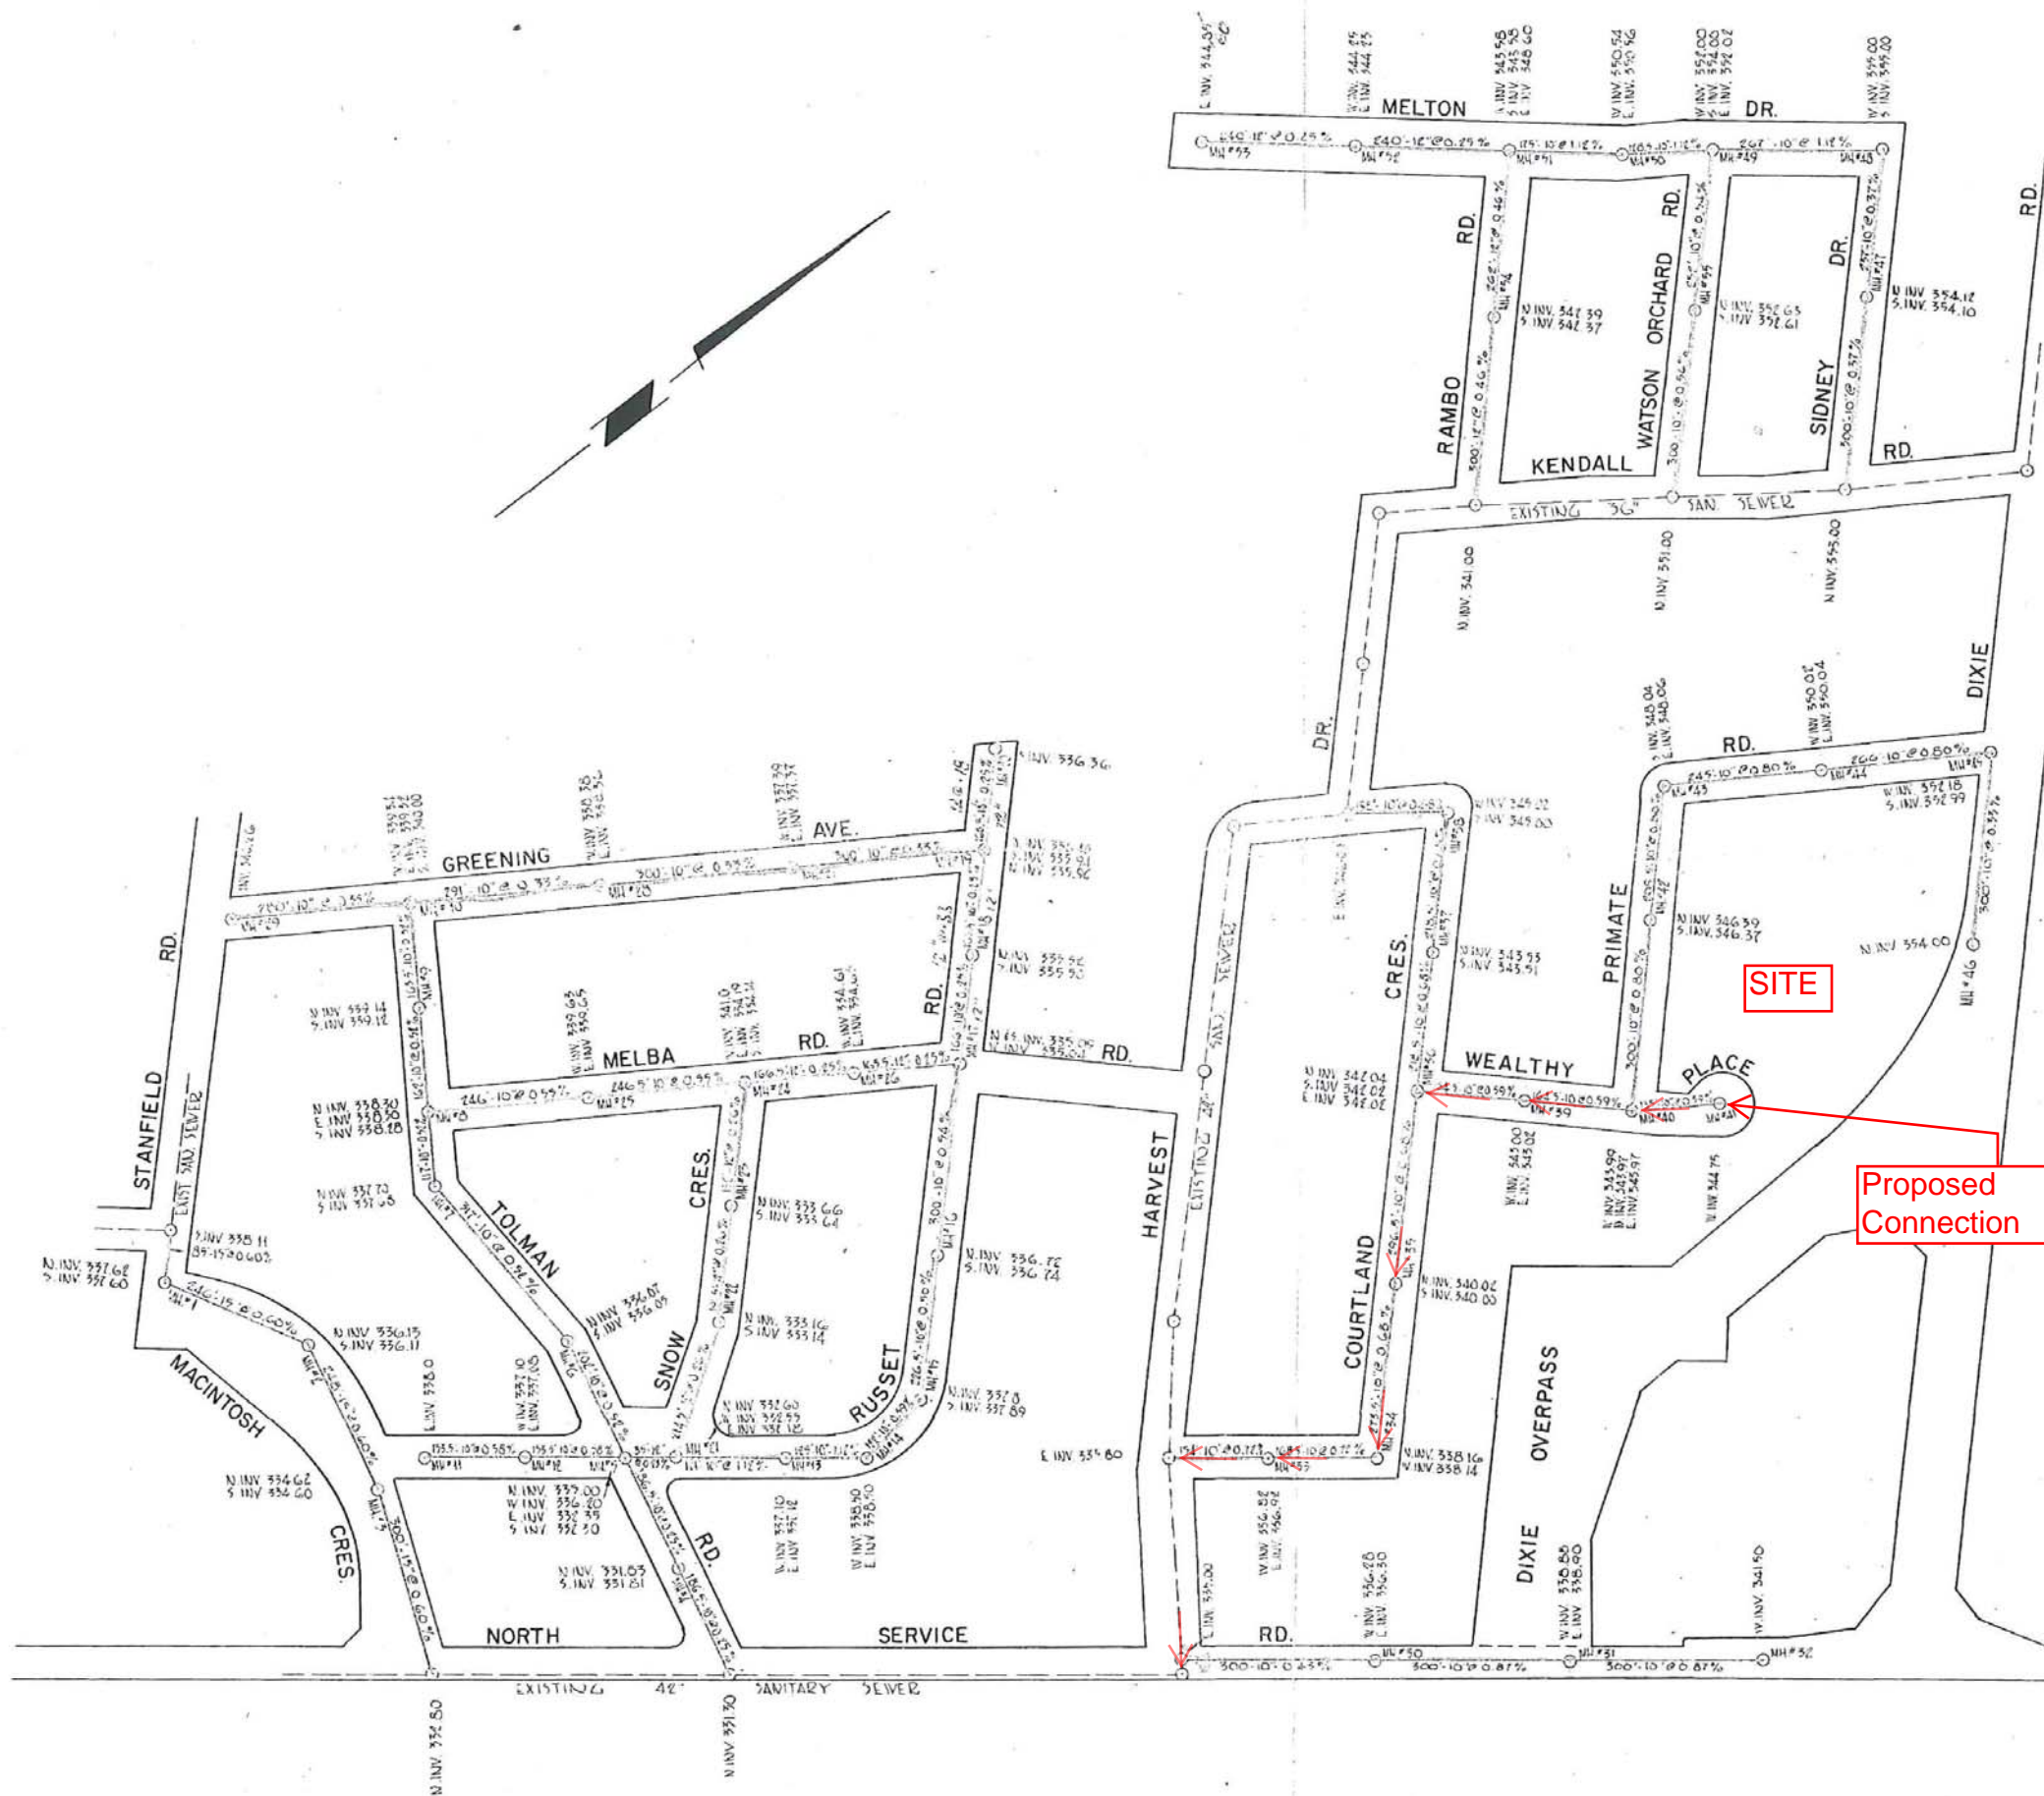

DISCLAIMER

These records are based upon available and unverified information and may prove inaccurate. The Region of Peel disclaims any responsibility should these records be relied upon to the detriment of any person.

EXTERNAL SANITARY SEWER DRAINAGE PLAN

TOWNSHIP OF TORONTO			
COUNTY OF PEEL			
ENGINEERING DEPARTMENT			
PROPOSED SANITARY SEWERS			
APPLEWOOD - EAST ACRES			
PN 27-61			
INVS	6 & 7	CON/DES	I.S.D.S.
AREAS	I.S.2	SURVEY BY	DRAWN BY: G. SUKEL
ORDERED BY		DATE	JULY 20, 1961
SCALE	1" = 200' - 0"	PLAN NO.	B - 5284



APPENDIX 'H'

- E-Mail Correspondence with City with Regards to
Storm Quality Requirements**

9/15/2017

Condeland Engineering Limited Mail - Fwd: Stormwater Management Criteria new residential developments

350 Creditstone Road, Unit 200,
Concord, Ontario, L4K 3Z2

Tel: (905) 695-2096 (ext. 26), Fax: (905) 695-2099
Email: mike@condeland.com

NOTE: The information in this electronic mail is private and confidential, and only intended for the addressee. Should you receive this message in error, you are hereby notified that any disclosure, reproduction, distribution or use of this message is strictly prohibited. Please inform the sender by reply transmission and delete the message without copying or opening any attachments.

On Mon, Jun 5, 2017 at 10:12 AM, Ghazwan Yousif <Ghazwan.Yousif@mississauga.ca> wrote:

Hi Michael,

For the first site Dixie Road, Primate Road and Wealthy Place, this site within the Applewood watershed, which required to control 100 year post development flow to the 2 year pre development level. Outlet is the existing 250mm storm sewer on Primate Rd. the Plan and profile drawing # C05179. **No quality control will be required.** For water balance first 5mm of rain to be retained within your site. I will send you the drainage plan and design sheet later

For the North-west corner of Main Street and Wyndham Street, this site within the Streetsville area which is under special requirements so you require to control 100 year post to the 2 year pre. Storm sewer outlet is the existing 250mm storm sewer on Wyndham Street also 450mm on Main Street. The Plan and profile drawing # C12986, C21791. **Please note that this site within the CVC regulated area.** No quality control will be required. For water balance first 5mm of rain to be retained within your site. I will send you the drainage plan and design sheet later

Regards,

Ghazwan



APPENDIX 'I'

- Rainwater Barrel Sizing Calculation**
- Infiltration Bed Sizing Calculation**
- Pre-Treatment OGS Manhole Design – CDS 2020 Model**

WATER BALANCE CALCULATION (CONDO LOTS)

PROJECT:

CITY PARK (DIXIE) INC.

Date: 14-Aug-19

Total Site Area =

8694.00

Based on daily rainfall target depth of

5

mm

Average Rainfall volume for the site = 8694 sq.m. x 0.005 m =

43.47

cu.m.

Drainage Catchment Area (sq.m.)		Initial Abstraction / Capture	Daily Volume Retained (cu.m.)	
Paved Areas (d/w, road, s/w) =	2878	1.0 mm	2878.00 * 1.00	2.88 cu.m.
Soft Landscaped Area =	4002	5.0 mm	4002.00 * 5.00	20.0 cu.m.
*Roof Areas (Rain Barrels) =	1814	5.0 mm	1814.00 * 5.00	9.1 cu.m.
* Runoff to Infiltration Bed =				17.78 cu.m.
8694.00			Total =	49.74 cu.m.
			% =	114.4%

* Refer to Rainwater Barrel and Infiltration Bed Design Calculations for More Detail

Therefore the minimum water balance target of 5 mm has been achieved.

WATER BALANCE CALCULATION (FREEHOLD LOTS)

PROJECT:

CITY PARK (DIXIE) INC.

Date: 14-Aug-19

Total Site Area =

2457.00

Based on daily rainfall target depth of

5

mm

Average Rainfall volume for the site = 2457 sq.m. x 0.005 m =

12.29

cu.m.

Drainage Catchment Area (sq.m.)		Initial Abstraction / Capture	Daily Volume Retained (cu.m.)	
Paved Driveway Areas =	386	1.0 mm	386.00 * 1.00	0.39 cu.m.
Soft Landscaped Area =	1308	5.0 mm	1308.00 * 5.00	6.5 cu.m.
*Rear Roof Areas (Rain Barrels) =	382	5.0 mm	382.00 * 5.00	1.9 cu.m.
Front Roof Areas (Soak-away pits) =	382	15.0 mm	382.00 * 15.00	5.7 cu.m.
2457.00		Total =		14.56 cu.m.
		% =	14.56 / 12.29	118.5%

* Refer to Rainwater Barrel Calculations for More Detail

Therefore the minimum water balance target of 5 mm has been achieved.

RAINWATER BARREL SIZING CALCULATION (CONDO LOTS)

Residential Roof Area = 1800.00 sq.m.
Imperviousness % = 90%
Impervious Area = 1620.00 sq.m.

Water Balance Target calculation,
runoff from a 10mm storm event must be retained on-site, therefore: 5.0 mm 24hr rainfall

Total site Runoff Volume to be Retained On-site = 8.10 cu.m.

Total Number of Lots = 18
*Required Rainwater Barrel Capacity per Lot = 0.45 cu.m.

* Rain Barrel size is readily available.

RAINWATER BARREL SIZING CALCULATION (FREEHOLD LOTS)

Residential Roof Area = 467.20 sq.m.
ImperVIOUSness % = 90%
ImperVIOUS Area = 420.48 sq.m.

Water Balance Target calculation,
runoff from a 5mm storm event must be retained on-site, therefore: 5.0 mm 24hr rainfall

Total site Runoff Volume to be Retained On-site = 2.10 cu.m.

Total Number of Lots = 8
Required Rainwater Barrel Capacity per Lot = 0.26 cu.m.

* Rain Barrel size is readily available.

INFILTRATION BED DESIGN - CITY PARK (DIXIE) INC.

*Percolation Rate Used= 100 (mm/hr)

* Geotechnical Investigation by Bruce A brown Associates Limited, dated Oct 4, 2018 confirms a soils percolation rate of 5 x 10-5 m/sec or 180mm/hr given the sandy soils - conservatively use 100mm/hr for infiltration trench sizing.

Trench Design

Calculate Trench Bottom Area Using Equation = 4.3 (MOE SWM Manual)

A = 1000 V/ PnT

Where

A = Trench Bottom Area (sq.m)

V = Runoff Volume to be infiltrated

P = Percolation rate in mm/hr

n = Porosity of the Storage Media (Clear Stone = 0.4)

T= Retention Time in hours

Calculating Runoff Volume to be Infiltrated

Lots 1-18	Area	Runoff Coeff.	Approx. Imp. Area
Tot. Road Area	2878.00 m²	0.90	2590.20 m²
Tot. Landscape Area	3864.00 m²	0.25	966.00 m²
TOTAL	6742.00 m²		3556.20 m²

(Note that the roof areas have been excluded as separate soak away pits are provided for each lot located in the rear yards)

First 5mm of every rainfall event must be retained on-site, therefore: 5.0 mm 24hr rainfall

Area ID	Total Site Runoff Volume to be Infiltrated
Lots 1-18	17.78 cu.m.
Total Volume Required	17.78 cu.m.

Calculating Required Trench Bottom Area

Area ID	n	P (mm/hr)	Runoff Volume (cu.m)	Retention Time (T) hrs	Required Trench Bottom Area (sq.m)
Lots 1-18	0.4	100	17.78	24.00	18.52

Calculating Depth of Storage Media (Trench Depth)

Using Equation 4.2 (MOE SWM Manual)

D = PT/1000

Where

D = Depth of Storage Media (m)

P = Percolation Rate (mm/hr) = 100.00

T = Drawdown Time (hrs) = 24.00

Depth (m)= D = 2.40 Use Depth(m) = 0.60

Percolation Rate Over Trench Area, or Qinfiltration

Lot #	Trench Bottom Length (m)	Trench Bottom Width (m)	Total Trench Bottom Area (sq.m)	Qinfiltration (m3/h)	Qinfiltration (lps)
1 to 18	15.0	5.5	82.50	0.060	0.017

Checking Storage availability

Lot #	Trench Bottom Area (sq.m)	Trench Depth (m)	Trench Volume (cu.m)	Storage Media Volume (cu.m)
1 to 18	82.50	0.60	49.50	19.80
Total Volume Provided				19.80

CDS ESTIMATED NET ANNUAL SOLIDS LOAD REDUCTION BASED ON THE RATIONAL RAINFALL METHOD BASED ON A FINE PARTICLE SIZE DISTRIBUTION

Project Name: City Park (Dixie)
 Location: Mississauga, ON
 OGS #: 1

Engineer: Condeland Engineering
 Contact: Michael Hall
 Report Date: 19-Sep-18

Area 1.1657 ha
 Weighted C 0.534
 CDS Model 2020

Rainfall Station # 204
 Particle Size Distribution FINE
 CDS Treatment Capacity 31 l/s

<u>Rainfall Intensity¹</u> <u>(mm/hr)</u>	<u>Percent Rainfall Volume¹</u>	<u>Cumulative Rainfall Volume</u>	<u>Total Flowrate (l/s)</u>	<u>Treated Flowrate (l/s)</u>	<u>Operating Rate (%)</u>	<u>Removal Efficiency (%)</u>	<u>Incremental Removal (%)</u>
0.5	9.4%	9.4%	0.9	0.9	2.8	98.1	9.2
1.0	11.0%	20.4%	1.7	1.7	5.6	97.3	10.7
1.5	10.1%	30.5%	2.6	2.6	8.3	96.5	9.7
2.0	9.6%	40.1%	3.5	3.5	11.1	95.7	9.2
2.5	7.9%	48.0%	4.3	4.3	13.9	94.9	7.5
3.0	6.4%	54.4%	5.2	5.2	16.7	94.1	6.0
3.5	4.4%	58.8%	6.1	6.1	19.4	93.3	4.1
4.0	4.2%	63.0%	6.9	6.9	22.2	92.5	3.9
4.5	3.7%	66.7%	7.8	7.8	25.0	91.7	3.4
5.0	3.3%	70.0%	8.7	8.7	27.8	90.9	3.0
6.0	5.6%	75.6%	10.4	10.4	33.3	89.3	5.0
7.0	4.0%	79.6%	12.1	12.1	38.9	87.7	3.5
8.0	3.5%	83.1%	13.8	13.8	44.4	86.1	3.0
9.0	2.2%	85.3%	15.6	15.6	50.0	84.5	1.9
10.0	1.7%	87.0%	17.3	17.3	55.6	82.9	1.4
15.0	6.3%	93.3%	26.0	26.0	83.3	75.0	4.7
20.0	2.3%	95.6%	34.6	31.2	100.0	63.2	1.4
25.0	1.8%	97.3%	43.3	31.2	100.0	50.5	0.9
30.0	0.8%	98.2%	51.9	31.2	100.0	42.1	0.4
35.0	0.9%	99.0%	60.6	31.2	100.0	36.1	0.3
40.0	0.3%	99.3%	69.2	31.2	100.0	31.6	0.1
45.0	0.5%	99.8%	77.9	31.2	100.0	28.1	0.1
50.0	0.2%	100.0%	86.5	31.2	100.0	25.3	0.0
							89.5
Removal Efficiency Adjustment ² =							6.5%
Predicted Net Annual Load Removal Efficiency =							83.0%
Predicted % Annual Rainfall Treated =							98.0%


* Based on 44 years of hourly rainfall data from Canadian Station 6158733, Toronto ON (Airport)

** CDS Efficiency based on testing conducted at the University of Central Florida

*** Adjustment for use of 60 minute time step data on site with a time of concentration less than 30 minutes

**** CDS design flowrate and scaling based on standard manufacturer model & product specifications


PLAN VIEW

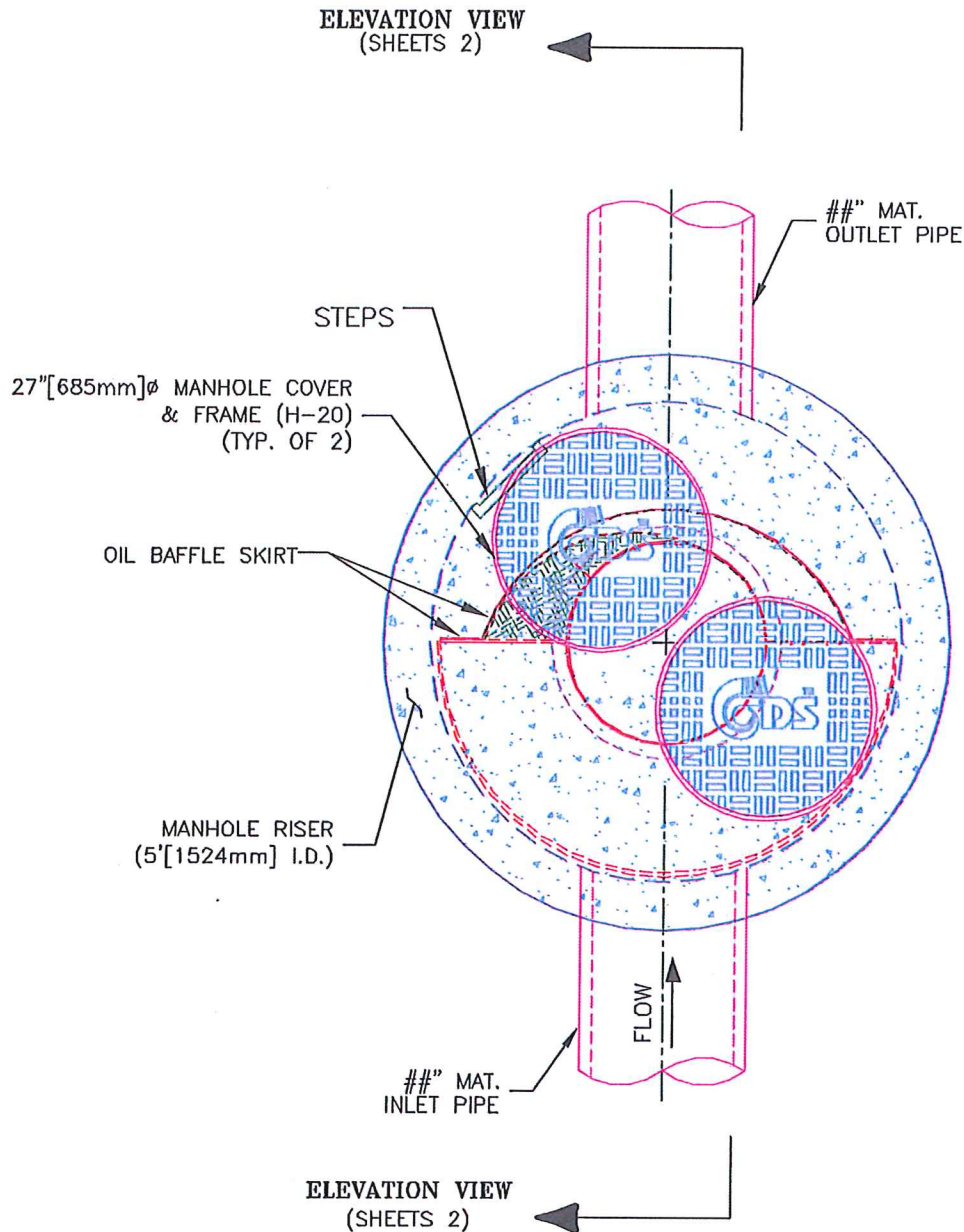

MODEL CDS20_20m, 31 L/s TREATMENT CAPACITY
STORM WATER TREATMENT UNIT



ELEVATION VIEW

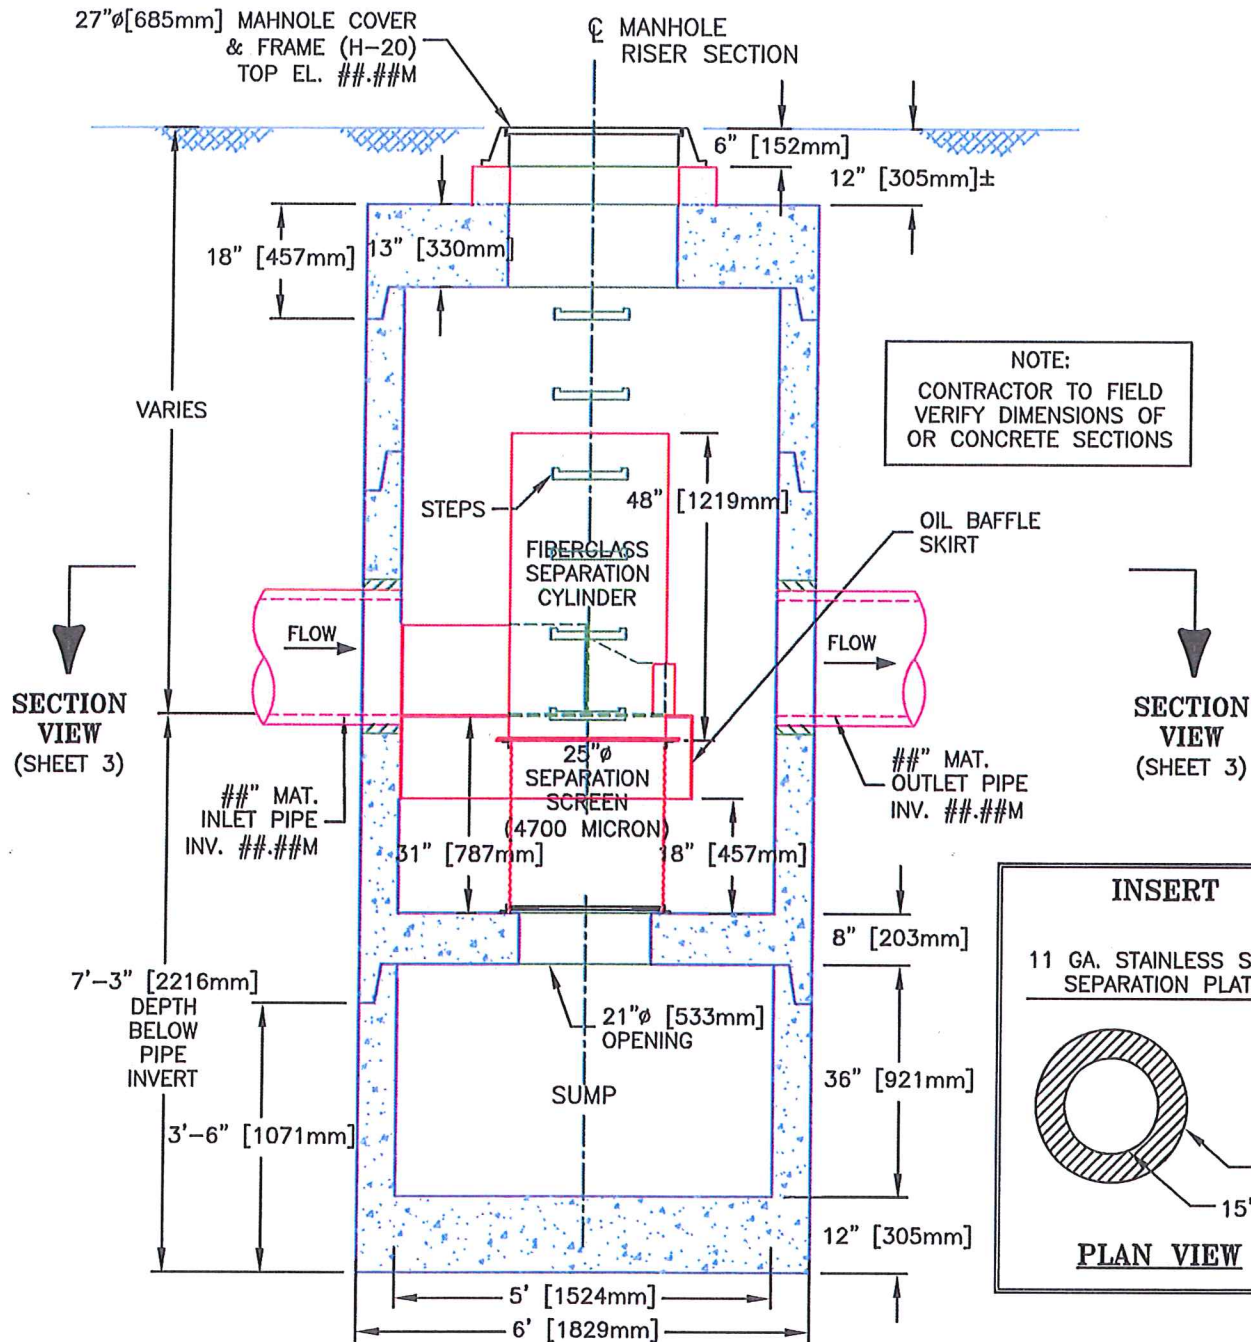

MODEL CDS20_20m, 31 L/s TREATMENT CAPACITY
STORM WATER TREATMENT UNIT



PROJECT NAME
CITY, STATE

JOB# XX-##-###

DATE ##/##/##

DRAWN INITIALS

APPROV.

SCALE
1" = 2.5'

SHEET

2



APPENDIX 'J'

- **Stormwater Quantity Control Analysis**
 - **Stage Storage Analysis**
- **Pre-Development Storm Tributary Plan**
- **Post-Development Storm Tributary Plan**
 - **Freehold Lots Soak-away Pit Design**
- **Primate Road Ditch and Culvert Capacity Analysis**
- **Existing 300mm Dia. Culvert (Crossing Wealthy Pl.) Capacity Calculation**
- **Proposed Twin 250mm Dia. HDPE Culvert (Crossing Wealthy Pl.) Capacity Calculation**

CONDELAND ENGINEERING LIMITED
TECHNICAL DIVISION
SITE PLAN STORM WATER MANAGEMENT

PROJECT NUMBER: 17-017

PROJECT LOCATION: 2103-2119 Pirmate Rd, 1351 & 1357 Wealthy Pl, 2116 & 2112 Dixie Rd

CITY OF MISSISSAUGA

CLIENT: CITY PARK (DIXIE ROAD) INC.

2019-07-18

A. SITE CRITERIA

TOTAL DEVELOPABLE SITE AREA:	13980.00	SQ.M.	
EXISTING CONDITIONS	(Site Area) 11151.00 SQ.M.	(External Area) 2829.00 SQ.M.	(Total Area) 13980.00 SQ.M.
Site Area draining to Dixie Rd.	8886.00 SQ.M.	2829.00 SQ.M.	11715.00 SQ.M.
HARD SURFACES	1425.00 SQ.M.	0.00 SQ.M.	1425.00 SQ.M.
SOFT SURFACES	7461.00 SQ.M.	2829.00 SQ.M.	10290.00 SQ.M.
Runoff Coefficient	0.34		
	0.90		
	0.25		(0.3 for Ext.)
Site Area drain to Pirmate Rd./ Wealthy Pl.	2265.00 SQ.M.	0.00 SQ.M.	2265.00 SQ.M.
HARD SURFACES	842.00 SQ.M.	0.00 SQ.M.	842.00 SQ.M.
SOFT SURFACES	1423.00 SQ.M.	0.00 SQ.M.	1423.00 SQ.M.
Runoff Coefficient	0.492		
	0.90		
	0.25		(0.3 for Ext.)

B. PROPOSED CONDO. DEVELOPMENT - STORM OUTLET TO DIXIE ROAD

PROPOSED CONDITIONS	(Controlled Area) 11385.00 SQ.M.	(Un-Controlled Area) 138.00 SQ.M.	(Total Area) 11523.00 SQ.M.	Runoff Coefficient 0.52
HARD SURFACES	4692.00 SQ.M.	0.00 SQ.M.	4692.00 SQ.M.	0.90
SOFT SURFACES	3864.00 SQ.M.	138.00 SQ.M.	4002.00 SQ.M.	0.25
SOFT SURFACES (EXTERNAL)	2829.00 SQ.M.	0.00 SQ.M.	2829.00 SQ.M.	0.30

SITE CONTROL REQUIREMENTS
 (NO ROOF TOP CONTROLS HAVE BEEN IMPLEMENTED, THEREFORE BUILDING AND PAVEMENT AREAS WILL BE COMBINED BELOW:)

MAX ALLOWABLE SITE DISCHARGE (BASED ON 2YRS, 15min. TC, 0.34 runoff coeff.) =
 (2-YR PRE-DEVELOPMENT FLOW TO DIXIE ROAD) (11715x 0.34) x (2.778*(610*(15+4.6)^(-0.78))^(10000)
 66.49 LPS

C. STORM NETWORK

C.1 PAVEMENT CONTROLLED AND UNCONTROLLED RUNOFF AREA

CONTROLLED AREA	UNCONTROLLED AREA	100 YR-RUNOFF COEFFICIENT
PAVEMENT / DRIVEWAY / WALKWAY AREA:	0.00 SQ.M.	0.90
SOFT LANDSCAPE	138.00 SQ.M.	0.25
EXTERNAL AREA	0.00 SQ.M.	0.30
TOTAL AREA=	138.00 SQ.M.	

C.2. EQUIVALENT RUNOFF COEFFICIENT FOR P&B&L AREAS	
R(100YR)=	0.5303
CONTROLLED	0.2500

C.3. STORAGE REQUIREMENTS FOR P&B&L AREAS

100-YR STORM CONTROL	1.6772
RAN (CONTROLLED)=	
RAN (UNCONTROLLED)=	0.0096
Quncontrolled =	1.35 LPS (based on initial Tc = 15 minutes)

ADDITIONAL Quncontrolled TO BE ACCOUNTED FOR FROM FREEHOLD LOTS	43.87 LPS	-	18.67 LPS	=	25.19 LPS	(100 Yr Pre to 2 Yr Pre)
TOTAL Quncontrolled	26.54 LPS					

HOWEVER FOR 100mm DIA SHORT TUBE ORIFICE (SECT C.5) WITH HEAD						
1.44 M						
MAXIMUM ORIFICE DISCHARGE IS =						

Qctrl-discharge =	34.25	LPS
-------------------	-------	-----

TIME (min)	INTENSITY mm/hr	Qcontrolled lps	Qtotal lps	Qctrl-discharge lps	change in flow lps	storage volume cu.m.
15.00	140.69	235.97	235.97	34.25	201.71	181.54
20.00	118.12	198.12	198.12	34.25	163.86	196.64
25.00	102.41	171.76	171.76	34.25	137.51	206.27
30.00	90.77	152.25	152.25	34.25	117.99	212.39
35.00	81.77	137.15	137.15	34.25	102.90	216.08
40.00	74.58	125.09	125.09	34.25	90.83	217.99
45.00	68.68	115.20	115.20	34.25	80.94	218.54
50.00	63.75	106.93	106.93	34.25	72.67	218.02
55.00	59.56	99.90	99.90	34.25	65.65	216.63

Therefore total storage required=
during the 100 yr storm

218.54 CU.M.

C.4. STORAGE PROVIDED

TOTAL UNDER GROUND STORAGE

@ MAX. TOP OF WATER LEVEL (T.W.L.) =

108.83 M

SEE STORAGE DATA ATTACHED

TOTAL STORAGE PROVIDED =

237.48 CU.M.

> 218.54 (VERIFIED)

C.5. ORIFICE DESIGN

FOR A STANDARD 100MM DIA ORIFICE PIPE

MAX. PIPE OUTFLOW=
UNCONT. OUTFLOW =

34.25 LPS
26.54 LPS

(Overland flow to Dixie Rd & Overcontrol for Freehold lots)

TOTAL SITE MAX. OUTFLOW (Overcontrolled)=

60.79 LPS

<= 2yr pre-develop = 66.49 l/s

MAX. STORAGE LEVEL

MAX. T.W.L.=
PIPE INVERT =
HEAD =

108.83 M
107.34 M
1.44 M

STORAGE REQ. =
STORAGE PROV. =

218.54 CU.M.
237.48 CU.M.

Q= ca(2gh)^{0.5}

C=



0.82

A=
diameter=

0.0079
100.00


sq.m.
mm

THEREFORE A 100mm DIA. ORIFICE PIPE IS VERIFIED

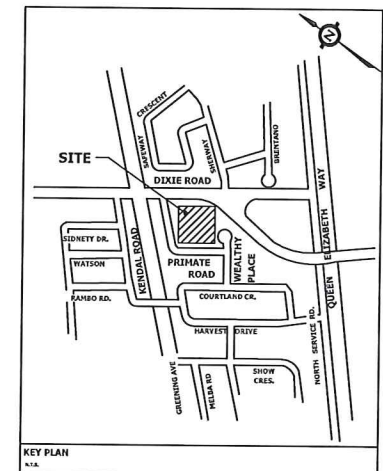

PLAN OF SURVEY SHOWING TOPOGRAPHY OF LOTS 26, 27, 28, 29, 30
AND 31 AND PART OF LOT 18
REGISTERED PLAN 473 AND PART OF LOT 6, CONCESSION 1 SOUTH OF
DUNDAS STREET
(GEOGRAPHIC TOWNSHIP OF TORONTO)
CITY OF MISSISSAUGA REGIONAL MUNICIPALITY OF PEEL

LEGEND



BENCHMARK NOTE

ELEVATIONS SHOWN HEREON ARE REFERRED TO THE CITY OF MISSISSAUGA BENCHMARK No. 351 HAVING AN ELEVATION OF 108.675 METRES LOCATED ON THE EAST FACE AT THE MAIN ENTRANCE OF APPLEWOOD PUBLIC SCHOOL ON THE WEST SIDE OF HARVEST DRIVE, 30.5 METRES SOUTH OF KENDALL ROAD.

4.	CITY COMMENTS FROM APRIL 26, 2019	AUG. 08/2019	M.E.H.
3.	CITY COMMENTS FROM DECEMBER 30, 2018	MARCH 06/2019	M.E.H.
2.	CITY COMMENTS FROM AUGUST 8, 2018	OCT.16/2018	M.E.H.
1.	FIRST SUBMISSION	JAN.09/2018	S.Ng.
REVISION BLOCK		DATE	APPR. BY

CITY PARK (DIXIE) INC.

**2103-2119 PRIMATE ROAD, 1351 & 1357
WEALTHY PLACE, 2116& 2112 DIXIE ROAD**



APPROVED AS TO FORM IN RELIANCE
UPON THE PROFESSIONAL SKILL AND
ABILITY OF CONDELAND
ENGINEERING LIMITED AS TO DESIGN
AND SPECIFICATION

DIRECTOR OF DEVELOPMENT/
TRANSPORTATION ENGINEERING

DATE: _____

CONDELAND

CONSULTING ENGINEERS & PROJECT MANAGERS


350 Creditstone Road, Unit 200
Concord, Ontario L4K 3Z2

P: (905) 695-2096
F: (905) 695-2099



PRE DEVELOPMENT STORM TRIBUTARY PLAN

DESIGNED BY: S.N./J.K.	DATE: AUGUST 2019	CHECKED BY: M.E.H.
DRAWN BY: G.M.	DRAWING NO.	
SCALES HOR 1:300	17-017 - 05	CITY FILE DARC 17-192

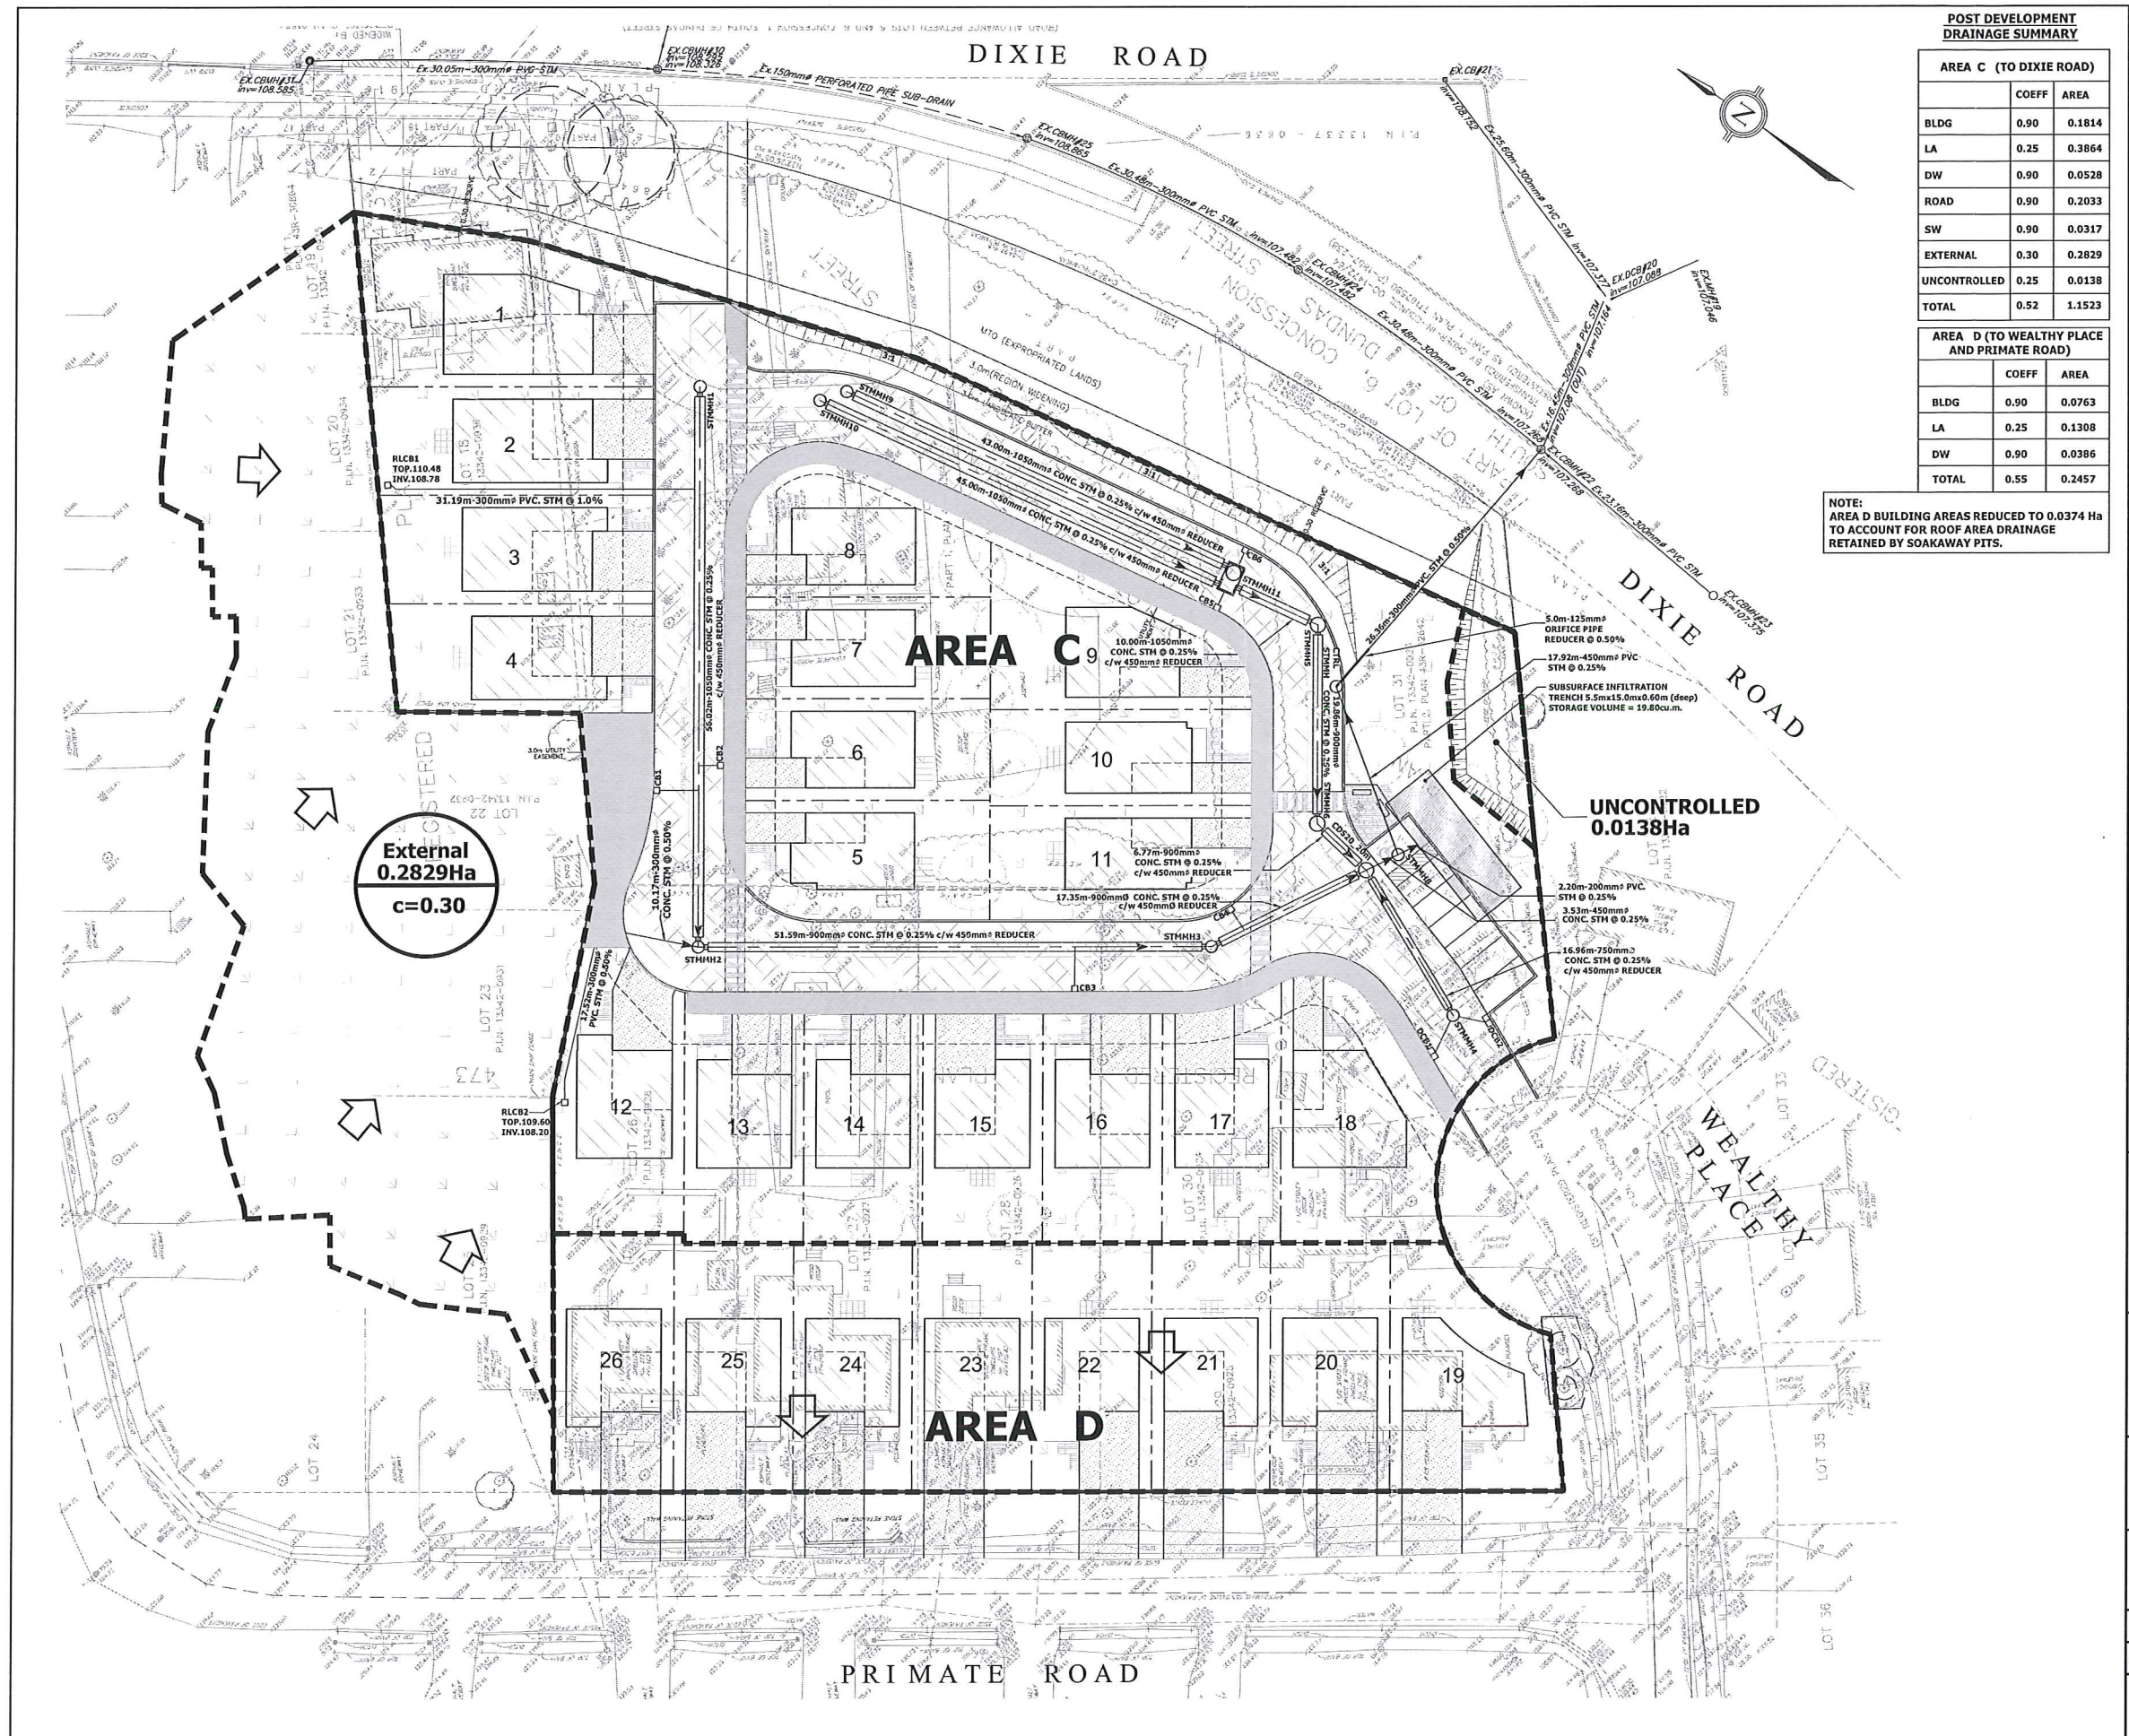

DEVELOPMENT: CITY PARK (DIXIE) INC.


CONSULTANT: CONDELAND ENGINEERING LTD.

Grassed Front Yard Ditch Flow of Lot 19 during 10 Year Storm Event (Worst Case Scenario)

DITCH CAPACITY ('V' Shape Ditch) @ Front of House

Swale Slope: S =	0.55%	See grading plan.
Roughness Coeff. n =	0.035	per MTO Drainage Manual
Depth of swale:	0.31 m	
Swale side slope: Z =	3.0 :1	
Swale top width:	2.40 m	
Swale bottom width: bw =	0.000 m	
Actual Flow depth: y =	0.268 m	Max Flow Depth: 0.31m
Flow area: A =	0.2155 sq.m	
Wetted perimeter: W =	1.695 m	
Hydraulic radius: R = A / W =	0.127 m	
Discharge Q =	115.43 l/s	0.1154 m3/s
Vel=	0.54 m/s	
10-yr Q =	0.1152 m3/s	

10 Year Ditch Flow Fronting Lot 19

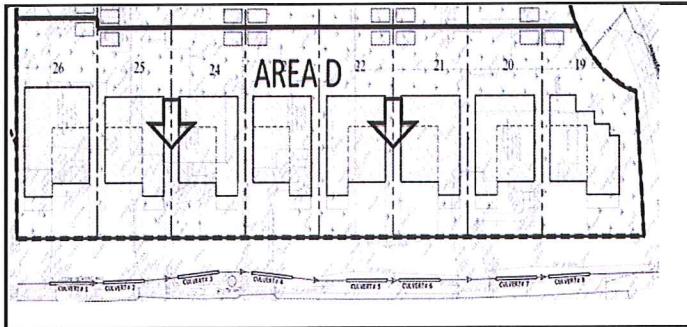

Post Development 10 Year Storm Event Flow

$$Q = 0.0028 C I A$$

$$C = 0.559098$$

$$10\text{-yr } I = 99.16574 \text{ mm/hr}$$

$$A = 0.742156 \text{ ha}$$

$$10\text{-yr } Q = 0.1152 \text{ m}^3/\text{s}$$



<u>Existing 300mm Dia. Culvert (Crossing Wealthy Pl.) Outlet Flow Capacity</u>			<u>Post Development 50 Year Storm Event Flow</u>	
Size:	300mm		Q = 0.0028 C I A	
Grade:	1.00%		C=	0.559098
Capacity	96.62 L/s	0.097 m3/s	50-yr I =	127.1334 mm/hr
			A=	0.742156 ha
			50-yr Q =	0.1477 m3/s

Existing 300mm Dia. HDPE Culvert Inlet Capacity

HYDRAULIC DESIGN OF CULVERTS

DESIGN CHARTS



CHART D5 - 1E

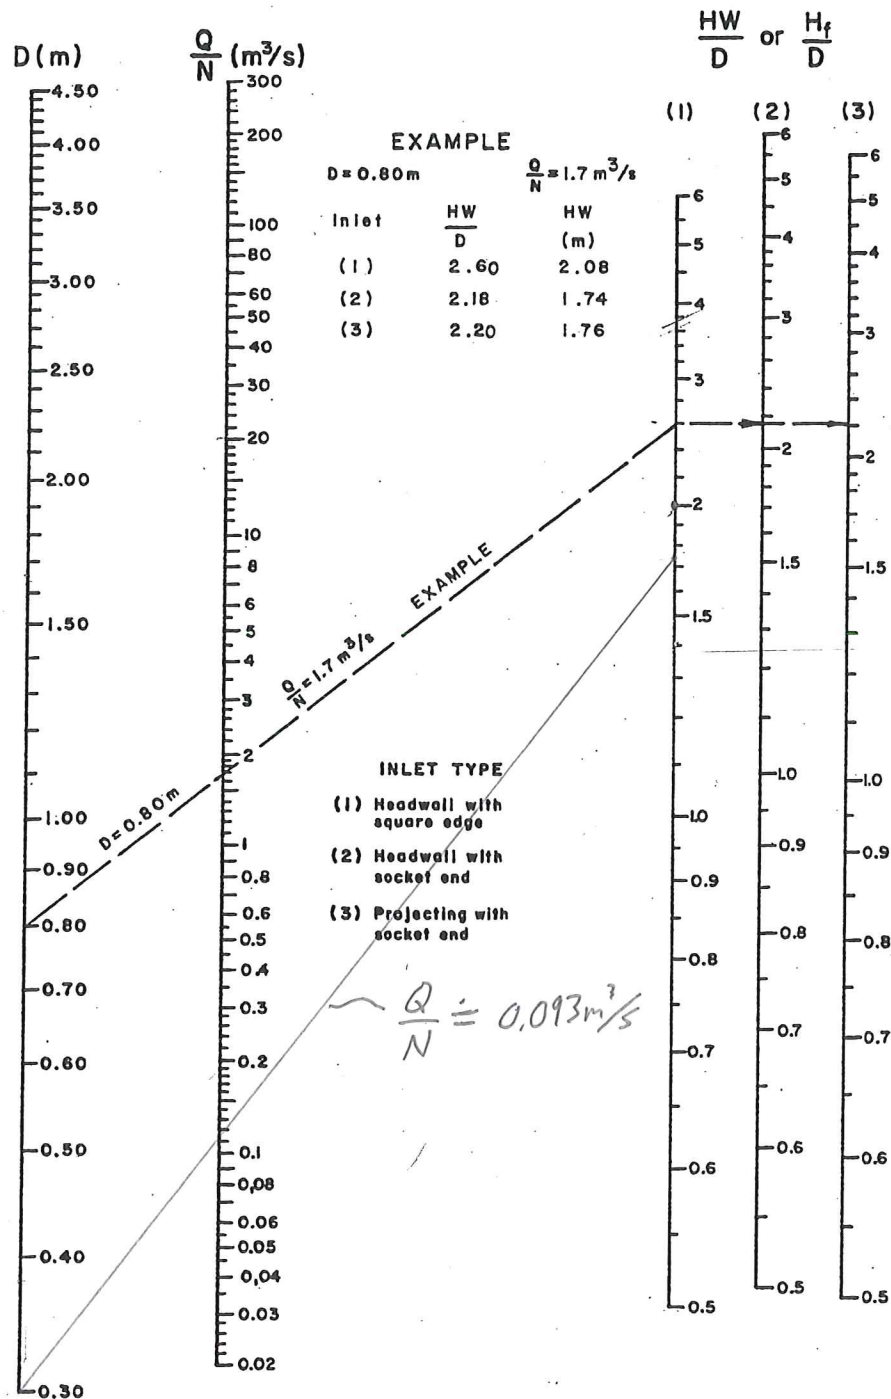

INLET CONTROL
CONCRETE PIPE CULVERT

$H_w = 0.4\text{ m}$
 $D = 0.3\text{ m}$
 $\frac{H_w}{D} = 1.33$
 $N = 1$

CHART D5 - 1E

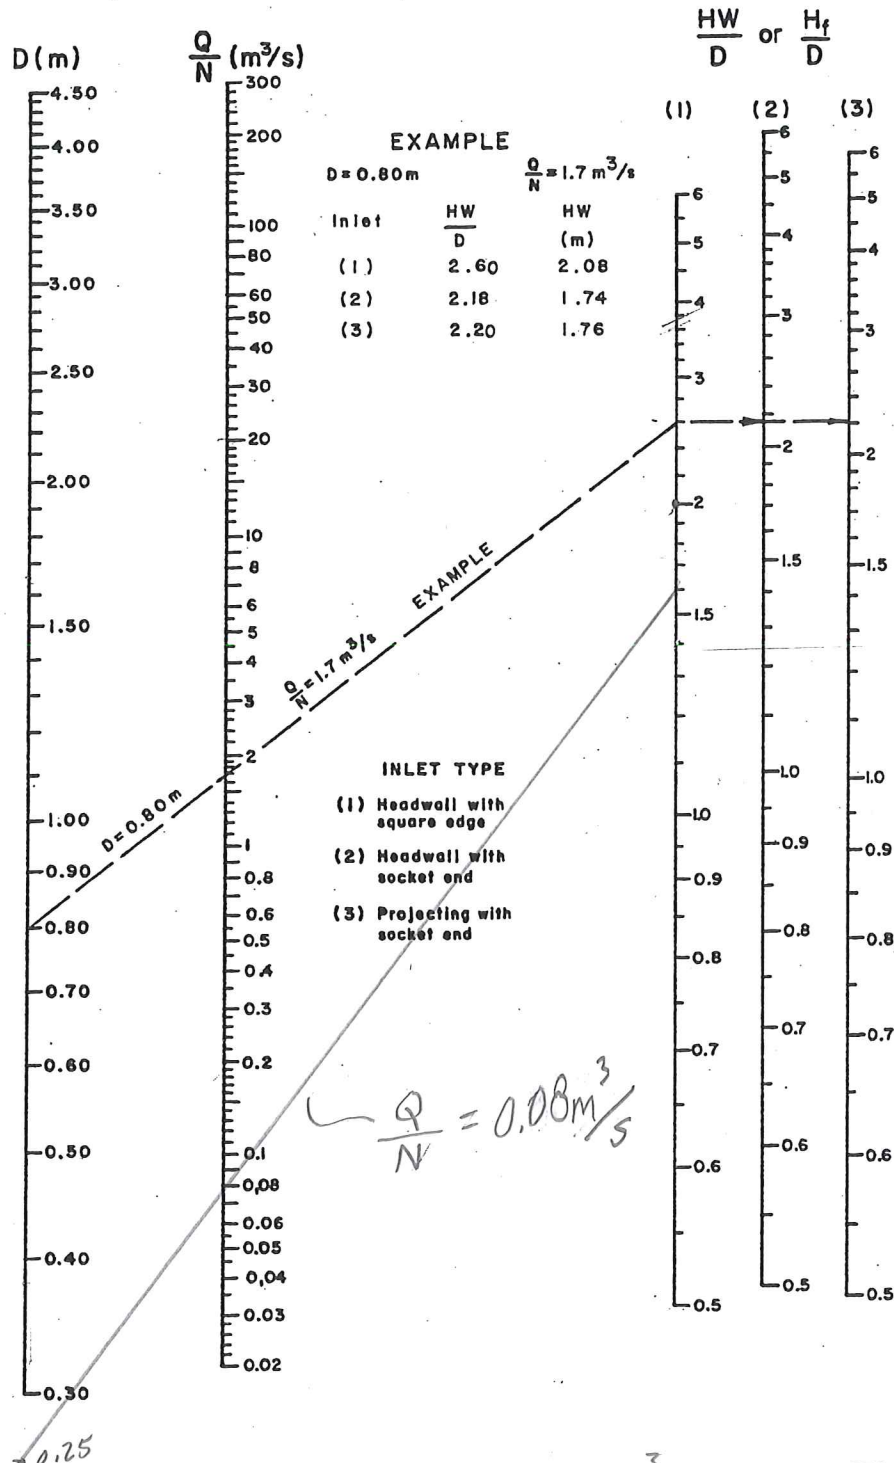

INLET CONTROL
CONCRETE PIPE CULVERT



APPENDIX 'K'

**- Geotechnical Investigation Prepared by
Bruce A. Brown Associates Limited
Dated October 4, 2018**



October 4, 2018

Geotechnical Investigation for 2116 and 2122 Dixie Road, City of Mississauga

Project 08*3368 BRUCE A BROWN ASSOCIATES LIMITED
CONSULTANTS IN THE ENVIRONMENTAL AND APPLIED EARTH SCIENCES


Contents

1.0	Introduction	2
1.1	Previous Investigations	3
1.2	Site Description	3
1.3	Regional Soil Conditions.....	3
2.0	Field Investigations	3
2.1	Clearing of Services	3
2.2	Site Investigation.....	4
2.2.1	Test Pits.....	4
2.3	Subsurface Conditions	4
3.0	Recommendations	4
3.1	Foundation Requirements – Slab-on-Grade	4
3.2	Foundation Requirements - Conventional Footings	5
3.3	Bedding for Services.....	5
3.4	Pavement Design	5
3.5	Earthquake Design	6
3.6	Soil Permeability	6
3.7	Deep Excavation and Shoring	7
4.0	Qualification.....	8
5.0	Closure	8

Enclosures:

- Appendix A Statement of Limitations for Geotechnical Evaluations
- Appendix B Site Location Plan & Test Pit Locations
- Appendix C Test Pit Logs

Distribution: 2 copies and 1 pdf to Client, mmonass@cityparkhomes.ca
1 copy to file



BRUCE A. BROWN ASSOCIATES LIMITED

Consultants in the Environmental and Applied Earth Sciences

101-102 Aerodrome Crescent

Toronto, Ontario, Canada M4G 4J4

Tel: (416) 424-3355 Email bruce@brownassociates.ca

Project 08*3368

June 18, 2018

Attn: Mr. Chris Zeppa

Central by City Park Homes Inc.,

950 Nashville Road

Kleinburg, ON

L0J 1C0

Dear Mr. Zeppa,

Re: Geotechnical Report for
Proposed Residential Redevelopment,
2116 and 2122 Dixie Road, Mississauga

1.0 Introduction

Brown Associates Limited was authorized by Mr. Chris Zeppa of City Park Homes to conduct a geotechnical investigation for proposed redevelopment of 2116 and 2122 Dixie Road, Mississauga. The redevelopment also takes in existing residences at 2103 to 2119 Primate Road, and 1351 and 1357 Wealthy Place, where these rear yards abut the Dixie property, which was a former single family residence, now demolished. This investigation has been carried out in conformity with the provision of the Statement of Limitations for geotechnical evaluations, which is attached as **Appendix A**, and forms a part of this report.

This investigation involved the advancement of five test pits to about 4m depth below grade, using a track-mounted hydraulic backhoe. Boreholes stood open for sufficient time for

groundwater to equilibrate before backfilling. Test pits are shown on the general site plan attached as **Appendix B**.

1.1 Previous Investigations

No previous geotechnical investigations for this site are known. Earlier studies by Brown Associates include a designated substances investigation prior to the demolition of the former house and garage on this site, an initial Phase 1 environmental report in 2008, when the residence was still standing, and an updated Phase 1 environmental report in 2018.

1.2 Site Description

The site is located on the west side of Dixie Road, just north of the Queen Elizabeth Way and North Service Road, incorporating the vacant lot at 2116-2122 Dixie Road, two single family residences on Wealthy Court numbers 1351 and 1357, each having a detached bungalow residence, and four properties on the east side of Primate Road, numbers 2103, 2107, 2113, and 2119, each developed with a *circa* 1950s detached bungalow residence. A Site Location Plan, Appendix B, is attached for reference.

The property has a frontage of approximately 109.4m on Dixie Road. The Dixie parcel has mature deciduous and conifer trees on perimeters and surrounding the former residence and garage. The original pavements for circular driveway and garage slab remain. It is nearly flat-lying, sloping to the west. The site has full municipal services, including sanitary sewers, gas, water and hydro.

1.3 Regional Soil Conditions

The area is underlain by shallow sediments, predominantly fine sand, extending to Georgian Bay Formation bedrock which is anticipated within 6 to 8 meters from grade. Georgian Bay Formation comprises shale with limestone layers of Lower Ordovician age.

2.0 Field Investigations

2.1 Clearing of Services

Public underground services were cleared under the Ontario One Call Program under ticket number 20183722843 (Promark-Telecon Inc.)

2.2 Site Investigation

2.2.1 Test Pits

On October 4, five test pits were excavated using a track-mounted Komatsu PC 88 HR excavator operated by Turbo Contracting. A Test Pit Location Plan and Test Pit Logs are attached.

Representative soil samples were obtained from face of test pit or retrieved from the bucket by our principal geotechnical engineer. A pocket penetrometer was also used on faces of excavation.

Logs of the excavations and subsurface condition were made, and are attached as **Appendix C**. Grades are related to geodetic elevations taken from an available topographic survey. All soils were found to be aesthetically clean without evidence of potential environmental concerns. All soils were undisturbed except in the top 0.9m of Test Pit 2 where a vitrified 100mm tile was found, originating as part of the former Class 4 onsite private waste system serving the former residence.

2.3 Subsurface Conditions

A consistent depth of 150mm of loose sandy black topsoil was found in all test locations, underlain by compact fine ochre sand with silt, grading to fine ochre sand with trace silt by 0.9m and to uniform compact light grey-brown fine sand by about 1m. Fine sand became dense by 1.3m depth and showed traces of depositional bedding plane for the remaining depth. By 2.5m depth, sand transitioned to fine sand with medium sand and by 3m depth transitioned to medium sand with fine sand and to medium light grey wet sand by about 3.3m depth below grade. Test Pits extended to between 3.75 and 5.2m below grade. Water equilibrated at the base of each test pit together with minor caving of side walls below depth of saturation after about 15 to 20 minutes.

3.0 Recommendations

3.1 Foundation Requirements – Slab-on-Grade

Slab-on-grade construction requires stripping of all topsoil and roots to depths of at least 200mm from present grades. Additional soil surcharge should be compacted in minimal lifts to achieve

at least 95% Standard Proctor Density. A concrete slab reinforced with 00-00 welded wire mesh generally will require 150mm of clear 19mm limestone bedding for lightly loaded structures.

3.2 Foundation Requirements - Conventional Footings

The existing native sand is compact and becomes dense by frost penetration depths, permitting use of conventional strip footings and column pads founded on original, undisturbed soils, with minimum depth of cover of 1.4m. A safe allowable bearing capacity of 140 kPa SLS (240 KPA SLS) is available. Full depth foundations for basements will be founded on dense fine sand at 2m below grade for which a safe allowable bearing capacity of 200 kPa SLS (350 ULS) is available on undisturbed material. Below 3m depth, design bearing is reduced by a factor of 2 because of proximity to saturated sand.

Excavated sand is not frost-susceptible and may be used without limitation for structural backfill. It is responsive to compactive effort using vibratory smooth drum equipment. Three 15M rebars are recommended to be supported on bricks or chairs to obtain at least 75mm cover beneath, for all load-bearing bases or walls. Minimum dimension of column pads shall be 750mm to prevent punching.

3.3 Bedding for Services

New services between depths of 1.5m and 3.0m may be bedded on native sand which will generally meet mechanical requirements of Granular "B", and local material may be used for backfill material up to spring line and to full depth. Any service trench deeper than 4m will require use of a moveable shear box because of the depth of saturation of medium sand.

3.4 Pavement Design

Any excavation shall be backfilled with Granular "B" soils or available recycled crusher-run concrete compacted to 95% Standard Proctor Density or better. The new internal road shall have a minimum of 200mm of Granular "B" compacted to at least 95% of Standard Proctor Density. An additional 2000mm of Granular "A" or 19mm crusher-run limestone shall be compacted in two or more lifts to 95% Standard Proctor Density or better.

A 75mm thickness of HL-8 base course asphaltic concrete shall be placed, and may stand through a full season, if required, before finishing with 30mm top course of HL-3 asphaltic concrete. A tack coat will be required on top of base course pavements when top course is deferred.

3.5 Earthquake Design

Earthquake factors for v and F , as applied in the Ontario Building Code, may be taken as 0.05 and 1.0 respectively for this site. All shallow overburden is Class C for earthquake design purposes.

The 2015 National Building Code of Canada interpolated seismic hazard values are determined for a 2% in 50-year (0.000404 per annum) probability of exceedance. Values are for “firm ground” (NBCC soil Class C, such the sand found at this site) with average overburden shear wave velocities of 360 – 760 m.s⁻¹.) Median (50th percentile) values are given in units of g for spectral acceleration ($S_a(T)$ where T is the period in seconds) and peak ground accelerations (PGA).

Only two significant figures are used. These values have been interpolated using Sheppard’s Method from a 10-km spaced grid of points, based on site coordinates of 43.599527° North and 79.571437° West.

National Building Code Seismic Hazard Values

2% in 50 years (0.000424 per annum) probability:

$S_a(0.2)$	$S_a(0.5)$	$S_a(1.0)$	$S_a(2.0)$	PGA
0.226	0.117	0.059	0.028	0.145g

3.6 Soil Permeability

Drywells or infiltration trenches should be effective means for surface water control. They should be designed based on a minimum depth of 1.25m to be below the silty sand zone and into the uniform sand which has superior hydraulic conductivity, estimated $5 \times 10^{-5} \text{ m.sec}^{-1}$. The best performance would be to excavate trenches to 1.25m depth, provide 100mm of 20-50mm clear stone base and use proprietary prefabricated arches to maximize storage volumes prior to backfilling. Drywalls with inverts between 2.5 and 3.25m depth below grade will encounter coarser sand with a marginally better hydraulic conductivity of $7.5 \times 10^{-5} \text{ m.sec}^{-1}$; however capacity may become limited by the effect of true water table mounding beneath such structures.

3.7 Deep Excavation and Shoring

Excavation to frost depth for perimeters and column pads may have vertical cuts to 1.4m depth, from underside of topsoil horizon. Deeper excavations shall not have vertical cuts beyond 1.4m faces, and near surface materials shall be trimmed back, as required, at 1:1 to match surrounding grades. For services cuts, in the alternative, a moveable shear box can be used to protect personnel. A geotechnical engineer, on examination, may be able to certify free-standing vertical faces between 0.5 and 2.5m depths below grade. Excavations below 3.5m depth will require shoring or slopes to be cut back to 2.5:1 H:V.

If deeper excavations are required, lateral soil pressure for permanent or temporary structures may be determined using the following equation:

$$P = K (\gamma H + q) \quad \text{where,}$$

P = lateral earth pressure	kPa
K = lateral earth pressure coefficient	0.4
γ = unit weight of fine sand or granular	21.0 kN/m ³
H = depth of wall below finished grade	m
q = surcharge loads adjacent to wall	kPa

This formula assumes free-draining conditions created by perimeter drainage systems to prevent any hydrostatic pressures from building behind perimeter walls, and is therefore valid to depths of 3.5m below original grade.

For temporary shoring, where there are building foundations or services behind temporary shoring within a distance of 0.5H, $K = K_o$ = earth pressure coefficient at rest should be 4.0, and where there are services between 0.5H and H beyond the wall and a minor amount of movement for temporary shoring is acceptable, K= may be 0.33.

Where slight to moderate ground movement is acceptable on the Balsam Street frontage only, for temporary shoring $K = K_a = 0.25$ active earth pressure coefficient.

4.0 Qualification

Brown Associates has 47 years of experience in the geo-environmental characterization of sites in the Toronto centered region. This firm carries \$2M environmental liability insurance and \$2M errors and omissions insurance, and enjoys a claims-free status.

5.0 Closure


Thank you for this opportunity to be of service. Should questions arise, please do not hesitate to call.

Yours very truly,

BRUCE A. BROWN ASSOCIATES LIMITED



Bruce A. Brown, Ph.D., MCIP, RPP, P.Eng., QPESA



Appendix A: Statement of Limitations for Geotechnical Evaluations

Bruce A. Brown Associates Limited

Geo-environmental Report
General Conditions and Limitations

Section 1: Use of the Report

- 1.1 The factual data, interpretations and recommendations contained in this report pertain to a specific project as described in the report and are not applicable to any other project or site location. If the project is modified in concept, location or elevation or if the project is not initiated within two years of the date of the report, Brown Associates should be given an opportunity to confirm that the recommendations are still valid.
- 1.2 Subsoils, groundwater, or other conditions which may affect design or implementation may differ between actual test locations and may not be appropriate for areas beyond those investigated.
- 1.3 The comments given in this report are intended only for the guidance of the design engineer. The number of test holes to determine all the relevant underground conditions which may affect construction costs, techniques and equipment choice, scheduling and sequence of operations, would be greater than has been carried out for design purposes. Contractors bidding on, or undertaking the work, should rely on their own investigations, as well as their own interpretations of the factual test hole data, as to how subsurface conditions may affect their work.
- 1.4 With the exception of instances where this firm is specifically retained to confirm field conditions, or to supervise construction or excavation, the responsibility of Bruce A. Brown Associates Limited shall be restricted to accurate interpretation of conditions at test location(s). No responsibility can be taken for the procedures or the sequence of effort carries out by any contractor, even when his final result would be to implement the recommended design, unless field supervision is requested from this firm.

Section 2: Follow Up

- 2.1 All details of the design and proposed construction may not be known at the time of submission of Brown Associates' report. It is recommended that Brown Associates be retained during the final design stage to review the design drawings and specifications related to foundations, earthworks, retaining systems and drainage, to determine that they are consistent with the intent of Brown Associates' report.
- 2.2 Retaining Brown Associates during construction is recommended to confirm and to document that the subsurface conditions throughout the site do not materially differ from those given in Brown Associates' report and to confirm and to document that construction activities did not adversely affect the design intent of Brown Associates' recommendations.

Section 3: Soil and Rock Conditions

- 3.1 Soils and rock descriptions in this report are based on commonly accepted methods of classification and identification employed in professional geotechnical practice. Classification and identification of soil and rock involves judgement and Brown Associates does not guarantee descriptions as exact, but implies accuracy only to the extent that is common in current geotechnical practice.
- 3.2 The soils and rock conditions described in this report are those observed at the time of study. Unless

otherwise noted, those conditions form the basis of the recommendations in the report. The condition of the soil and rock may be significantly altered by construction activities (traffic, excavation, pile driving, blasting, etc.) on the site or on adjacent sites. Excavation may expose soils to changes due to wetting, drying or frost. Unless otherwise indicated the soil and rock must be protected from these changes or disturbances during and after construction.

Section 4: Logs of Test Holes and Subsurface Interpretations

- 4.1 Soil and rock formations are variable to a greater or lesser extent. The test hole logs indicate the approximate subsurface conditions only at the locations of the test holes. Boundaries between zones on the logs are often not distinct, but rather are transitional and have been interpreted. The precision with which subsurface conditions are indicated depends on the method of boring, the frequency of sampling and the uniformity of subsurface conditions. The spacing of test holes, frequency of sampling and type of boring also reflect budget and schedule considerations.
- 4.2 Subsurface conditions between test holes are inferred and may vary significantly from conditions encountered at the test holes.
- 4.3 Groundwater conditions described in this report refer only to those observed at the place and time of observation noted in the report. These conditions may vary seasonally or as a consequence of construction activities on the site or on adjacent sites.

Section 5: Changed Conditions

- 5.1 Where conditions encountered at the site differ significantly from those anticipated in this report, either due to a natural variability of subsurface conditions or due to construction activities, it is a condition of the use, or reliance by the client, of this report that Brown Associates be notified of the changes and provided with an opportunity to review the recommendations of this report. Recognition of changed soil and rock conditions requires experience and it is recommended that an experienced geotechnical engineer be employed to visit the site with sufficient frequency to detect if conditions have changed significantly.

Section 6: Drainage

- 6.1 Drainage of subsurface water is commonly required either for temporary or permanent installations for the project. Improper design or construction of drainage systems can have serious consequences. Brown Associates can assume no responsibility for the effects of drainage unless Brown Associates is specifically involved in the detailed design and follow-up site supervision and inspection during construction of the drainage system.

Appendix B: Site Location Plan & Test Pit Locations

Appendix C: Test Pit Logs

Test Pit 1. Elevation 110.4 geodetic. Invert 106.6 masl.

- 0.0 Loose, black sandy topsoil. Non-cohesive, non-plastic, with roots.
- 0.18 Ochre to light brown fine sand with silt. Loose, uniform, non-plastic, becoming firm by 0.5m and compact by 1.0m depth.
- 1.0 Light brown fine sand, compact, uniform, dry, grading to light grey-brown becoming dense by 2m depth.
- 2.0 Dense, fine grained grey-brown uniform sand, minor horizontal bedding plane, grading to fine sand with medium sand, to medium dense sand by 3m depth.
- 3.8 Invert of test pit in uniform light grey medium sand. Saturated below 3.3m.
Water equilibration at 3.5m after one hour with minor side wall collapse below 3.5m depth. *GWL = 106.90m*

Test Pit 2. Elevation 109.9 geodetic. Invert 106.15 masl.

- 0.0 Loose, black sandy topsoil. Non-cohesive, non-plastic, with roots.
- 0.15 Ochre to light brown fine sand with silt. Loose, uniform, non-plastic, becoming firm by 0.5m and compact by 1.0m depth.
- 1.0 Vitriified clay pipe at 0.9m depth, no stone bedding. Light brown fine sand, compact, uniform, dry, grading to light grey-brown becoming dense by 2m depth. Non-plastic, non-cohesive.
- 2.0 Dense, fine grained grey-brown uniform sand, minor horizontal bedding plane, grading to fine sand with medium sand, to medium dense sand by 3m depth.
- 3.9 Invert of test pit in uniform light grey medium sand. Saturated below 3.3m.
Water equilibration at 3.6m after one hour with minor side wall collapse below 3.5m depth. *GWL = 106.30m*

Test Pit 3. Elevation 109.8 geodetic. Invert 106.2 masl.

- 0.0 Loose, black sandy topsoil. Non-cohesive, non-plastic, with roots.
- 0.20 Ochre to light brown fine sand with silt. Loose, uniform, non-plastic, becoming firm by 0.5m and compact by 1.2m depth.
- 1.0 Light brown fine sand, compact, uniform, dry, grading to light grey-brown becoming dense by 2m depth.
- 3.0 Dense, fine grained grey-brown uniform sand, minor horizontal bedding plane, grading to fine sand with medium sand, to medium dense sand by 3m depth.

- 3.9 Invert of test pit in uniform light grey medium sand. Saturated below 3.3m.
Water equilibration at 3.6m after one hour with minor side wall collapse below 3.4m depth. *GWL = 106.20m*

Test Pit 4. Elevation 109.9 geodetic. Invert 106.0 masl.

- 0.0 Loose, black sandy topsoil. Non-cohesive, non-plastic, with roots.
0.22 Ochre to light brown fine sand with silt. Loose, uniform, non-plastic, becoming firm by 0.3m and compact by 0.9m depth.
1.0 Light brown fine sand, compact, uniform, dry, grading to light grey-brown becoming dense by 2m depth.
3.0 Dense, medium grained grey-brown uniform sand, minor horizontal bedding plane, by 3m depth.
3.9 Invert of test pit in uniform light grey medium sand. Saturated below 3.3m.
Water equilibration at 3.3m after one hour with minor side wall collapse below 3.6m depth. *GWL = 106.60m*

Test Pit 5. Elevation 110.4 geodetic. Invert 106.4 masl.

- Loose, black sandy topsoil. Non-cohesive, non-plastic, with roots.
0.17 Ochre to light brown fine sand with silt. Loose, uniform, non-plastic, becoming firm by 0.5m and compact by 1.0m depth.
1.0 Light brown fine sand, compact, uniform, dry, grading to light grey-brown becoming dense by 2m depth.
2.0 Dense, fine grained grey-brown uniform sand, minor horizontal bedding plane, grading to fine sand with medium sand, to medium dense sand by 3m depth.
4.2 Invert of test pit in uniform light grey medium sand. Saturated below 3.3m.
Water equilibration at 3.5m after one hour with minor side wall collapse below 3.5m depth. *GWL = 106.90m*

All test pits backfilled and compacted to grade on completion of program.